

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

• **BLACK BORDERS**

- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS

• **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**

- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THOMSON  DELPHION		RESEARCH My Account Products	SERVICES Search: Quick/Number Boolean Advanced	INSIDE DELPHION
--	--	--	--	------------------------

The Delphion Integrated View

Get Now: [More choices...](#)Tools: Add to Work File: [Create new Wo](#)View: [INPADOC](#) | Jump to: [Top](#)[Email](#)

Title: JP2001110455A2: NONAQUEOUS ELECTROLYTE BATTERY

Country: JP Japan

Kind: A2 Document Laid open to Public inspection

Inventor: YAMADA ATSUO;
HORIE TAKESHI;
YAMADA SHINICHIRO;
NODA KAZUHIRO;

Assignee: SONY CORP
[News, Profiles, Stocks and More about this company](#)

Published / Filed: 2001-04-20 / 1999-10-12

Application Number: JP1999000289782

IPC Code: [H01M 10/40](#); [H01M 4/02](#); [H01M 4/58](#); [H01M 6/16](#); [H01M 6/18](#);

Priority Number: 1999-10-12 JP1999000289782

Abstract:


PROBLEM TO BE SOLVED: To solve problems regarding environmental responsibility and safety, while realizing high capacity and low cost for a nonaqueous electrolyte battery.

SOLUTION: A nonaqueous electrolyte battery comprising a negative electrode, a positive electrode, and electrolyte for reversely absorbing and emitting lithium is disclosed. The positive electrode contains a compound that is indicated by the general formula Li_xMyPO_4 (where $0 \leq x \leq 2$, $0.8 \leq y \leq 1.2$, M is an element containing 3d transition metal). Electrolyte contains siloxane derivative. A granule diameter of Li_xMyPO_4 which is contained in the positive electrode is preferably not more than 10 μm . 10-percentage volume built-in diameter of Li_xMyPO_4 which is contained in the positive electrode is preferably not more than 1 μm . For example, LiFePO_4 is cited for Li_xMyPO_4 .

COPYRIGHT: (C)2001,JPO


Family: None

Forward References:

PDF	Patent	Pub.Date	Inventor	Assignee	Title
	US6528033	2003-03-04	Barker, Jeremy	Valence Technology, Inc.	Method of making lithium containing materials

Other Abstract Info: CHEMABS 134(20)283304Y CHEMABS 134(20)283304Y





[Nominate this for the Gal](#)

© 1997-2003 Thomson Delphion

[Research Subscriptions](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [Site Map](#) | [Contact](#)



(19)

(11) Publication number: **200**

Generated Document.

PATENT ABSTRACTS OF JAPAN(21) Application number: **11289782**(51) Intl. Cl.: **H01M 10/40 H01M 4/02 H01M 6/16 H01M 6/18**(22) Application date: **12.10.99**

<p>(30) Priority:</p> <p>(43) Date of application publication: 20.04.01</p> <p>(84) Designated contracting states:</p>	<p>(71) Applicant: SONY CORP</p> <p>(72) Inventor: YAMADA ATSUO HORIE TAKESHI YAMADA SHINICHIRO NODA KAZUHIRO</p> <p>(74) Representative:</p>
---	---

(54) NONAQUEOUS ELECTROLYTE BATTERY


(57) Abstract:

PROBLEM TO BE SOLVED: To solve problems regarding environmental responsibility and safety, while realizing high capacity and low cost for a nonaqueous electrolyte battery.

SOLUTION: A nonaqueous electrolyte battery comprising a negative electrode, a positive electrode, and electrolyte for reversely absorbing and emitting lithium is disclosed. The positive electrode contains a compound that is indicated by the general formula $\text{Li}_x\text{M}_y\text{PO}_4$ (where $0 \leq x \leq 2$, $0.8 \leq y \leq 1.2$, M is an element containing 3d transition metal). Electrolyte contains siloxane derivative. A granule diameter of $\text{Li}_x\text{M}_y\text{PO}_4$ which is contained in the positive electrode is preferably not more than 10 μm . 10-percentage volume built-in

diameter of Li_xMyPO_4 which is contained in the positive electrode is preferably not more than $1\ \mu\text{m}$. For example, LiFePO_4 is cited for Li_xMyPO_4 .

COPYRIGHT: (C)2001, JPO

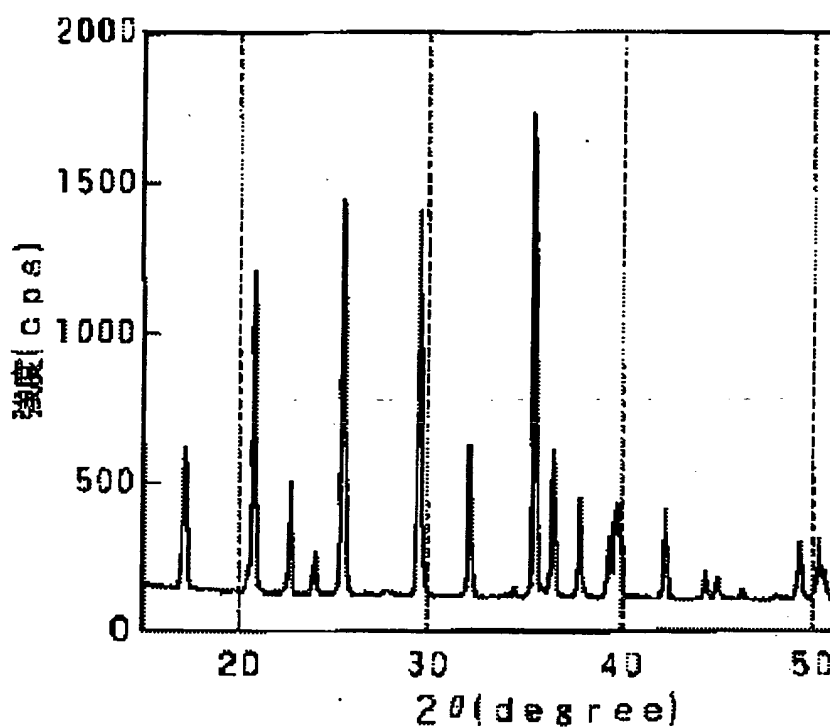

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2001-110455

(43)Date of publication of application : 20.04.2001

(51)Int.Cl.

H01M 10/40
H01M 4/02
H01M 4/58
H01M 6/16
H01M 6/18

(21)Application number : 11-289782

(71)Applicant : SONY CORP

(22)Date of filing : 12.10.1999

(72)Inventor : YAMADA ATSUO

HORIE TAKESHI

YAMADA SHINICHIRO


NODA KAZUHIRO

(54) NONAQUEOUS ELECTROLYTE BATTERY

(57)Abstract:

PROBLEM TO BE SOLVED: To solve problems regarding environmental responsibility and safety, while realizing high capacity and low cost for a nonaqueous electrolyte battery.

SOLUTION: A nonaqueous electrolyte battery comprising a negative electrode, a positive electrode, and electrolyte for reversely absorbing and emitting lithium is disclosed. The positive electrode contains a compound that is indicated by the general formula Li_xMyPO_4 (where $0 \leq x \leq 2$, $0.8 \leq y \leq 1.2$, M is a component containing 3d transition metal). Electrolyte contains siloxane derivative. A granule diameter of Li_xMyPO_4 which is contained in the positive electrode is preferably not more than $10 \mu\text{m}$. 10-percentage volume built-in diameter of Li_xMyPO_4 which is contained in the positive electrode is preferably not more than $1 \mu\text{m}$. For example, LiFePO_4 is cited for Li_xMyPO_4 .

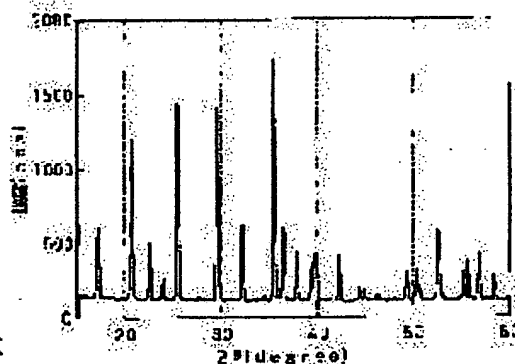

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office

(19)日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11)特許出願公開番号

特開2001-110455

(P2001-110455A)

(43)公開日 平成13年4月20日(2001.4.20)

(51)Int.Cl.	識別記号	F I	テ-ト-ト(参考)
H01M 10/40		H01M 10/40	Z 5H003
	4/02	4/02	A 5H014
	4/58	4/58	C 5H024
	6/16	6/16	5H029
			A

審査請求 未請求 請求項の数5 OL (全10頁) 最終頁に続く

(21)出願番号 特願平11-293782

(22)出願日 平成11年10月12日(1999.10.12)

(71)出願人 000002185

ソニー株式会社

東京都品川区北品川6丁目7番35号

(72)発明者 山田 淳夫

東京都品川区北品川6丁目7番35号 ソニ

株式会社内

(72)発明者 堀江 毅

東京都品川区北品川6丁目7番35号 ソニ

株式会社内

(74)代理人 100087736

弁理士 小池 晃 (外2名)


最終頁に続く

(54)【発明の名称】 非水電解質電池

(57)【要約】

【課題】 高容量化や低コスト化を実現しながら、環境対応性や安全性の問題を解決する。

【解決手段】 リチウムを可逆的に吸蔵、放出する負極と、正極と、電解質とを備えた非水電解質電池が開示される。正極は、一般式 $Li_xM_yPO_z$ 。(ただし、式中、 x は $0 \leq x \leq 2$ 、 y は $0.8 \leq y \leq 1.2$ である、また、 M は3d遷移金属を含む成分である。)で表される化合物を含有する。電解質は、シロキサン誘導体を含有する。正極に含まれる $Li_xM_yPO_z$ は、粒子径が $10 \mu m$ 以下のものを含むことが好ましい。また、正極に含まれる $Li_xM_yPO_z$ は、10%体積平均径が $1 \mu m$ 以下であることが好ましい。 $Li_xM_yPO_z$ としては、例えば $LiFePO_4$ である。

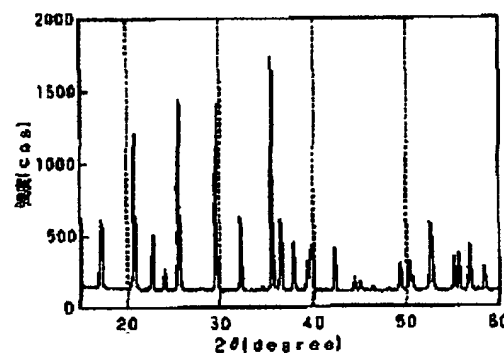

(2)

特開2001-110455




1

2

【特許請求の範囲】

【請求項1】 リチウムを可逆的に吸蔵、放出する負極と、

一般式 $L_iM_xPO_y$ 、(ただし、式中、 x は $0 \leq x \leq 2$ 、 y は $0.8 \leq y \leq 1.2$ である、また、 M は3d遷移金属を含む成分である。)で表される化合物を含有す*



(式中、 a は0から100の整数を表し、 b は1から100の整数を表し、 m は0から100の整数を表し、 n は0から100の整数を表し、 R は水素原子又はアルキル基を表す。ただし、 $b > 1$ のときは、 b 個の D' は同じでも異なってもよい。 D' 及び R に含まれる水素原子はハロゲン原子で置き換えられていてもよい。)

【請求項2】 上記正極は、粒子径が10 μm 以下の $L_iM_xPO_y$ を含むことを特徴とする請求項1記載の非水電解質電池。

【請求項3】 上記正極に含まれる $L_iM_xPO_y$ は、10%体積累積径が1 μm 以下であることを特徴とする請求項1記載の非水電解質電池。

【請求項4】 上記 $L_iM_xPO_y$ は、 L_iFePO_4 であることを特徴とする請求項1記載の非水電解質電池。

【請求項5】 上記電解質は、互いに半相互侵入型高分子網目構造を形成することが可能な2種以上の高分子化合物を含み、これら高分子化合物のうちの1種が上記シリキサン誘導体であることを特徴とする請求項1記載の非水電解質電池。

【発明の詳細な説明】

【0001】

【発明の属する技術分野】 本発明は、秩序型オリビン構造を有する化合物を正極活性物質とする非水電解質電池に関するものである。

【0002】

【従来の技術】 近年、種々の電子機器の飛躍的進歩と

* 正極と、
電解質とを備え、

上記電解質は、下記(化1)で表されるシリキサン誘導体を含有することを特徴とする非水電解質電池。

【化1】

もに、長時間便利に、且つ経済的に使用できる電池として、再充電可能な二次電池の研究が進められている。代表的な二次電池としては、鉛蓄電池、アルカリ蓄電池、リチウム二次電池等が知られている。

【0003】 上記のような二次電池の中でも、特に、リチウム二次電池は、高出力、高エネルギー密度等の利点を有している。リチウム二次電池は、リチウムイオンを可逆的に吸蔵、放出可能な活性物質を有する負極や正極と、非水電解質とから構成される。

【0004】 そして、一般に、リチウム二次電池の負極活性物質としては、金属リチウム、リチウム合金、リチウムがドーパされた導電性高分子、層状化合物(炭素材料や金属酸化物等)等が用いられている。

【0005】 また、正極活性物質としては、金属酸化物、金属硫化物、あるいはポリマー等が用いられ、例えば Ti_2S_5 、 MoS_2 、 $NbSe_3$ 、 V_2O_5 等の非含リチウム化合物や、 L_iMO_2 ($M = Co, Ni, Mn, Fe$ 等)のような L_i を含んだ複合酸化物が提案されている。

【0006】

【発明が解決しようとする課題】 ところで、上述のリチ

(3)

特開2001-110455

3

ウム二次電池においては、様々な課題が残されており、それらの改善が要望されている。

【0007】例えば、従来のリチウム二次電池においては、高エネルギー密度、高電圧が得られるとの観点から、対し1.4Vの電位を有する LiCoO_2 が正極として広く実用化されている。 LiCoO_2 は、様々な面で理想的な正極材料であるが、Coは地球上に資源として偏在し、且つ稀少であるため、多大なコストを要し、また安定供給に問題があるといった問題があり、これに代わる正極材料の開発が望まれている。

【0008】正スピネル型構造を有する LiMn_2O_4 （空間群Fd3m）は、現状では唯一の4V級のMnベースの正極材料であり、その容易な合成法、電池容量の点から非常に有望であり、既に一部実用化されている。

【0009】しかしながら、実電池への応用を考えた場合、高温保存時の容量劣化やMnの電解液中への溶解というような安定性に関する問題、さらにはサイクル特性に関する問題が未解決のまま残されている。

【0010】また、Mnよりも資源的に豊富で毒性に関してもCo、Ni、Mn等よりも遙かに低いFeをベースにした正極材料が実現できれば非常に有用であると考えられるが、これまでの検討では十分な特性は得られていない。これまでは、 LiCoO_2 や LiNiO_2 と類似な構造を有する LiFeO_2 を基本組成とする材料の検討が中心に行われてきたが、作製が困難な上に構造が不安定であり、2次電池用正極物質としては全く不十分な特性しか実現されていない。

【0011】一方、電解液に関しても、従来、可燃性の有機溶媒が使用されており、様々な問題を残している。例えば、不用意な短絡時に急激に大電流が流れて発熱し、これによって電解液が気化、分解を起こし、ガスを発生するという問題がある。このようなガスの発生は、電池の破損や破壊等につながる可能性がある。

【0012】その解決方法としては、電池内圧の上昇により開裂する安全弁や電流遮断装置を設ける等の対処がなされている。

【0013】しかしながら、このような構造・機構の改良では、いかなる問題にも対処できるとは限らず、電池材料の抜本的な改善が必要になってきている。

【0014】そこで本発明は、かかる従来の実情に鑑みて提案されたものであり、高容量化や低コスト化を実現しながら、環境対応性や安全性の問題を低減することが可能な非水電解質電池を提供することを目的とする。

【0015】

【課題を解決するための手段】上述の目的を達成するために、本発明は、リチウムを可逆的に吸蔵、放出する負極と、一般式 $\text{Li}_x\text{M}_y\text{PO}_4$ （ただし、式中、xは $0 \leq x \leq 2$ 、yは $0.8 \leq y \leq 1.2$ である。また、Mは3d遷移金属を含む成分である。）で表される化合物を含

4

有する正極と、電解質とを備え、上記電解質は、シロキサン誘導体を含有することを特徴とするものである。

【0016】良く知られるように、FeはCo、Ni、Mn等の元素に比べると資源的に遙かに豊富であり、価格も安く、無毒無害である。さらに、シロキサン誘導体の主成分であるSiも地球上に極めて豊富に存在することも良く知られている。

【0017】したがって、 LiFePO_4 からなる正極材料とシロキサン誘導体を含有する電解質とを組み合わせることで、低コストで環境負荷や毒性が極めて低い電気化学デバイスが実現される。

【0018】さらに、化学的安定性が高く、難燃性で且つ低蒸気圧の無機高分子であるシロキサンを電解質材料に用いることにより、電解液の気化、分解が抑制され、同時に電池の破損、発火の危険性も抑制され、優れた電池性能が達成される。

【0019】加えて、 LiFePO_4 の酸素はPと強固に共有結合しているため、解離が極めて起こり難く、燃焼反応を誘起し難いという特徴がある。したがって、上記シロキサン誘導体が有する難燃性、低蒸気圧という性質とも相俟って、極めて安全性の高い電池システムが構築される。

【0020】

【発明の実施の形態】以下、本発明を適用した非水電解質電池の構成について、図面を参照しながら詳細に説明する。

【0021】本発明の非水電解質電池は、基本的な構成要素として、正極、負極、電解質を備える。

【0022】そして、本発明においては、まず、正極物質としてオリビン構造を有する化合物、すなわち一般式 $\text{Li}_x\text{M}_y\text{PO}_4$ （ただし、式中、xは $0 \leq x \leq 2$ 、yは $0.8 \leq y \leq 1.2$ である。また、Mは3d遷移金属を含む成分である。）で表される化合物を用いる。

【0023】 $\text{Li}_x\text{M}_y\text{PO}_4$ で表される化合物としては、例えば、 $\text{Li}_x\text{Fe}_y\text{PO}_4$ 、 $\text{Li}_x\text{Mn}_y\text{PO}_4$ 、 $\text{Li}_x\text{Co}_y\text{PO}_4$ 、 $\text{Li}_x\text{Ni}_y\text{PO}_4$ 、 $\text{Li}_x\text{Cu}_y\text{PO}_4$ 、 $\text{Li}_x(\text{Fe}, \text{Mn})_y\text{PO}_4$ 、 $\text{Li}_x(\text{Fe}, \text{Co})_y\text{PO}_4$ 、 $\text{Li}_x(\text{Fe}, \text{Ni})_y\text{PO}_4$ 、 $\text{Li}_x(\text{Cu}, \text{Mn})_y\text{PO}_4$ 、 $\text{Li}_x(\text{Cu}, \text{Co})_y\text{PO}_4$ 、 $\text{Li}_x(\text{Cu}, \text{Ni})_y\text{PO}_4$ 等が挙げられる。なお、各化合物において、括弧内の元素の組成比は任意である。

【0024】例えば、 LiFePO_4 は、体積密度が 3.6 g/cm^3 と大きく、3.4Vの高電位を発生し、理論容量も 170 mAh/g と大きい。しかも、 LiFePO_4 は、初期状態で、電気化学的に脱ドーピング可能なLiを、Fe原子1個あたりに1個含んでいるので、リチウムイオン電池の正極物質として能力が極めて高い。また、後述するように、この LiFePO_4 は、簡便な方法で合成することができる。

【0025】ただし、上記 LiFePO_4 を実際の電池

(4)

特開2001-110455

5

の正極活物質として用いようとした場合、これまでの合成法により得られる LiFePO_4 では、 60mAh/g ～ 70mAh/g 程度の実容量しか得られず、最大でも 120mAh/g 程度の実容量が実現されるに過ぎない。理論容量が 170mAh/g であることを考えると、十分な容量が達成されているとはいえない。

【0026】例えば、 LiFePO_4 と LiMn_2O_4 とを比較した場合、 LiMn_2O_4 は、平均電圧が3.9Vであり、 120mAh/g の容量を有し、さらに体積密度が 4.2g/cm^3 であるから、 LiFePO_4 は、 LiMn_2O_4 と比較して電圧、体積密度ともに1割程度小さいことになる。このため、同じ 120mAh/g の容量を有する LiFePO_4 は、 LiMn_2O_4 よりも重量エネルギー密度で1割以上、体積エネルギー密度で2割以上小さくなってしまふ。

【0027】従って、 LiFePO_4 で LiMn_2O_4 と同等レベルあるいはそれ以上のエネルギー密度を実現するためには、 140mAh/g あるいはそれ以上の容量が要求されるが、 LiFePO_4 でこのような高容量はこれまで実現されていない。

【0028】また、 LiFePO_4 は、従来、合成原料となるFe源として酢酸鉄 $\text{Fe}(\text{CH}_3\text{COO})_3$ 等の2価の鉄の塩を用い、還元環境下にて 800°C という比較的高温で加熱されることにより合成されている。合成時の加熱温度が高いと、その分エネルギーを消費することになり、また、反応装置等に与える負荷も大きい。

【0029】さらに、 800°C という比較的高温で加熱されることにより合成された LiFePO_4 は、結晶化が過剰に進行してしまう。このため、非水電解質電池の正極活物質に用いたとき、 LiFePO_4 粒子内でのリチウムの拡散が十分に起こらず、十分に高い容量を得ることができない虞れがある。

【0030】これらの問題を解消すべく、種々の検討を重ねた結果、 $\text{Li}_x\text{M}_2\text{PO}_4$ としては、粒子径が $10\mu\text{m}$ 以下であるものを含むものを用いるのが良いことがわかった。正極活物質が含有する $\text{Li}_x\text{M}_2\text{PO}_4$ として、粒子径が $10\mu\text{m}$ 以下である $\text{Li}_x\text{M}_2\text{PO}_4$ を含まない場合には、粒度分布が適切でないため、電荷担体であるリチウムが正極活物質の粒子内において十分に拡散することができないものと推測している。

【0031】また、 $\text{Li}_x\text{M}_2\text{PO}_4$ は、10%体積累積径が $1\mu\text{m}$ 以下であることが好ましい。10%体積累積径が $1\mu\text{m}$ より大きい場合には、 $\text{Li}_x\text{M}_2\text{PO}_4$ は、結晶化が過度に進行し巨大粒子が大部分を占めてしまふ虞れがある。このように結晶化が過度に進行すると、電荷担体であるリチウムが、正極活物質の粒子内において円滑に拡散することができない虞れがある。

【0032】上述のような粒度分布を有する $\text{Li}_x\text{M}_2\text{PO}_4$ 、例えば LiFePO_4 は、以下に示すようにして合成する。

6

【0033】まず、合成原料として例えば酢酸鉄 $\text{Fe}(\text{CH}_3\text{COO})_3$ と、リン酸水素アンモニウム $(\text{NH}_4)_2\text{H}_2\text{P}_2\text{O}_7$ と、炭酸リチウム (Li_2CO_3) とを所定比で混合して前駆体とする。ここで、合成原料の混合は十分に行う。合成原料を十分に混合することで、各原料が均一に混ざり合い、接触点が増えるため、従来よりも低い温度で LiFePO_4 を合成することが可能になる。

【0034】次に、この前駆体を窒素等の不活性ガス雰囲気中、所定の温度で加熱することにより、 LiFePO_4 が合成される。

【0035】従来、 LiFePO_4 は例えば 800°C という比較的高温で合成されていた。合成時の温度が高いと、その分エネルギーを消費することになり、また、反応装置等に与える負荷も大きかった。

【0036】そこで、合成原料を十分に混合して前駆体とし、窒素気流中で加熱して合成を行うことにより、例えば 300°C という、従来の 800°C に比べてはるかに低い温度で LiFePO_4 を合成することが可能となる。すなわち、従来に比べてより広い温度範囲で LiFePO_4 を合成することが可能となり、合成時の温度の選択の幅が広がる。

【0037】本発明者は、 LiFePO_4 を合成する際に、前駆体を加熱する温度（以下、合成温度と称する。）と、 LiFePO_4 を活性物質として用いた電池の容量との関係に着目し、最適な LiFePO_4 の合成温度について検討した。

【0038】その結果、 LiFePO_4 の合成温度は、 400°C 以上、 700°C 以下の範囲とすることが好ましいことがわかった。合成温度は 400°C 以上、 600°C 以下の範囲であることがより好ましい。

【0039】 LiFePO_4 の合成温度が 400°C よりも低いと、化学反応と結晶化が十分に進まず、均一な LiFePO_4 を得ることができない。また、 LiFePO_4 の合成温度が 700°C よりも高いと、結晶化が過剰に進行してしまい、不純物の析出が抑えられない虞れがある。

【0040】なお、上述した製造方法において、前駆体を加熱合成する前に、前駆体に対して脱空気処理を施し、前駆体中に含まれる空気を予め除去しておくことが好ましい。

【0041】前駆体中に空気が残存していると、 LiFePO_4 の合成時に、2価の鉄化合物である酢酸鉄中の Fe^{2+} が、空気中の酸素によって酸化されて Fe^{3+} となってしまう。その結果、不純物である3価の鉄化合物が生成物の LiFePO_4 中に混入してしまう。脱空気処理により予め前駆体中に含まれる空気を除去することで、酢酸鉄中の Fe^{2+} の酸化を防ぐことができる。その結果、3価の鉄化合物が生成物の LiFePO_4 中に混入せず、単相の LiFePO_4 を得ることができる。

(5)

特開2001-110455

7

【0042】 LiFePO_4 の合成原料としては、上述した化合物以外にも、水酸化リチウム、硝酸リチウム、酢酸リチウム、リン酸リチウム、リン酸第一鉄、酸化第一鉄等、種々の原料を用いることができるが、 400°C 以上、 700°C 以下という比較的低温で合成するためには、反応性の高い原料を用いることが好ましい。

【0043】上述したような製造方法では、合成原料を混合して前駆体とし、この前駆体を 400°C 以上、 700°C 以下の温度で加熱するので、化学反応と結晶化とが均一に進行し、且つ結晶化が過度に進行しない、これにより、不純物が無く、単相の LiFePO_4 が得られ *

8




*る。このようにして合成される LiFePO_4 を正極活物質として用いれば、 LiFePO_4 の理論容量である 170mAh/g に迫る高い実容量を実現することができる。

【0044】なお、上記製造方法は、上述したような LiFePO_4 に限らず、一般式 $\text{Li}_x\text{M}_y\text{PO}_4$ で表される化合物にも適用される。

【0045】一方、本発明においては、電解質が下記の化2にて示されるシロキサン誘導体を含有する。

【0046】

【化2】




(式中、 a は0から100の整数を表し、 b は1から100の整数を表し、 m は0から100の整数を表し、 n は0から100の整数を表し、 R は水素原子又はアルキル基を表す。ただし、 $b > 1$ のときは、 b 個の D' は同じでも異なってもよい。 D' 及び R に含まれる水素原子はハロゲン原子で置き換えられていてもよい。)

【0047】具体的には、下記の化3～化5に示すような構造を有するシロキサン誘導体を用いることができる。 ※

【化3】

※


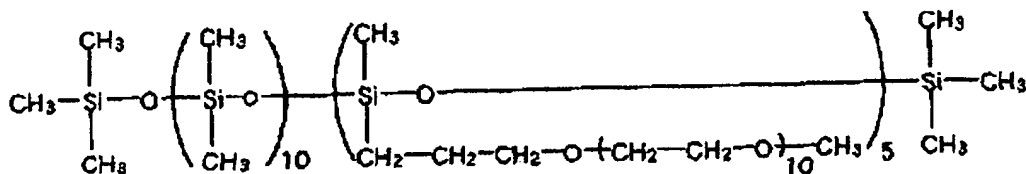


【0049】

【化4】


(6)

特開2001-110455

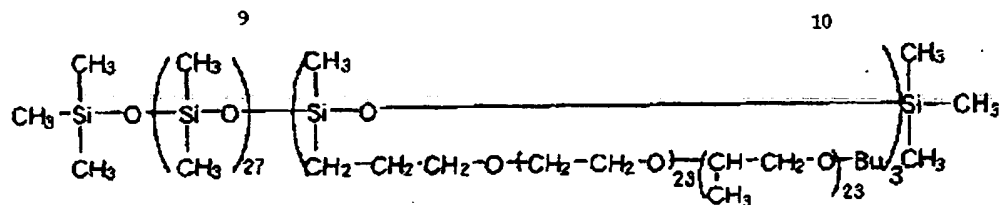

[0050]

* * 【化5】

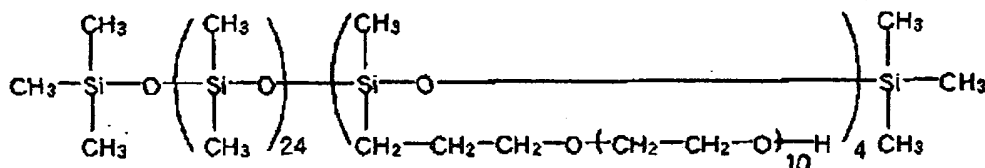

【0051】上記シロキサン誘導体は、硅素と酸素との鎖状結合を基本骨格にもち、硅素に1箇の有機基が側鎖として付加された鎖状型シロキサン誘導体であり、化学的安定性が高く、難燃性で低蒸気圧であるために熱化学的安定性にも優れる無機高分子である。

【0052】電解質は、液状のいわゆる電解液であってもよいし、固体電解質やゲル状電解質であってもよい。

【0053】電解質を電解液とする場合、シリキサン誘導体には、粘度が比較的低い溶液状であり、且つ軽金属塩を溶解し得る構造が求められる。すなわち、シリキサン誘導体は、温度25℃における動粘性率が5000cSt（センチストークス）以下であり、平均分子量が10000以下であることが求められる。

【0054】さらに、電解液としては、温度25℃における導電率が $0.1 \text{ mS} \cdot \text{cm}^{-1}$ 以上であることがより好ましい。

【0055】電解液として使用に耐え得る適正な粘度、混合に適する溶解性は、化2で示されるシロキサン誘導体におけるモノマーユニットD、D'の側鎖を適度を選択することにより可能となる。特に、モノマーユニットD'の側鎖は、エーテル結合を含むことが有利である。また、D、D'及び置換基R中の水素は、フッ素、ホウ素等のハロゲン元素で置き換えられていてもよい。

【0056】電解液の非水溶媒としては、例えばプロピレンカーボネート、エチレンカーボネート、ブチレンカーボネート、ビニレンカーボネート、 γ -ブチロラクトン、スルホラン、1, 2-ジメトキシエタン、1, 2-ジエトキシエタン、2-メチルテトラヒドロフラン、3-メチル1, 3-ジオキソラン、プロピオン酸メチル、酪酸メチル、ジメチルカーボネート、ジエチルカーボネート

ート、ジプロピルカーボネート等を使用することができる。特に、高圧安定性の点からは、プロピレンカーボネート、ビニレンカーボネート等の環状カーボネート類、ジメチルカーボネート、ジエチルカーボネート、ジプロピルカーボネート等の鎖状カーボネート類を使用することが好ましい。また、このような非水溶媒は、1種類を単独で用いてもよいし、2種類以上を混合して用いてもよい。

【0057】固体電解質（溶媒を全く含まない完全固体電解質を含む。）やゲル電解質とする場合には、使用する高分子材料としては、シリコンゲル、アクリルゲル、アクリロニトリルゲル、ポリフォスファゼン変成ポリマー、ポリエチレンオキシaid、ポリプロピレンオキシaid、及びこれらの複合ポリマーや架橋ポリマー、変成ポリマー等、若しくはフッ素系ポリマーとして、例えばポリ（ビニリデンフルオロaid）やポリ（ビニリデンフルオロaid-co-ヘキサフルオロプロピレン）、ポリ（ビニリデンフルオロaid-co-テトラフルオロエチレン）、ポリ（ビニリデンフルオロaid-co-トリフルオロエチレン）等、及びこれらの混合物が各種使用できるが、勿論、これらに限定されるものではない。

【0058】また、互いに半相互侵入型高分子網目構造を形成することが可能な2種以上の高分子化合物からなる組成物を固体電解質やゲル電解質のマトリクスポリマーとしてもよい。

【0059】このうち少なくとも1種の高分子化合物は、化学的に架橋可能な官能基を有する化合物が当該架橋点において架橋された第1の高分子化合物であり、他の少なくとも1種の高分子化合物は、架橋可能な官能基を有さず難金属塩を溶解する第2の高分子化合物、すな

(7)

11

わち上記シロキサン誘導体である。

【0060】この組成物は、第1の高分子化合物の3次元網目構造の基本骨格に、第2の高分子化合物であるシリキサン誘導体が相溶した状態になっている。

【0061】一般に、第1の高分子化合物は架橋されているので、機械的強度は高いが、架橋により分子運動が抑制され、溶存イオンの移動度が小さくなり、イオン伝導率は小さいという性質を有する。一方、第2の高分子化合物は、架橋されていないので、分子の運動量が高く、ガラス転移温度も低く、高いイオン伝導率を有するが、機械的強度に劣るという性質を有している。

【0062】ここでは、第1の高分子化合物と第2の高分子化合物とが半相互侵入型高分子網目構造を形成しており、それらの利点（強い機械的強度と高いイオン導電率）がそれぞれ生かされる。すなわち、半相互侵入型高分子網目構造においては、第1の高分子化合物と第2の高分子化合物との間では化学結合が実質的に生じておらず、第2の高分子化合物の分子運動が抑制されることはない。また、第2の高分子化合物の結晶化が起こり難くなるという相乗効果も加わり、広い温度範囲で高分子*20

* 化合物単独の場合よりも高いイオン導電率が得られる。

さらに、第1の高分子化合物が構成する3次元網目構造により強い機械的強度が得られる。

【0063】架橋による3次元網目構造としては、直鎖状の化合物、あるいは分岐状の化合物の両末端、片末端を架橋したもの、側鎖に架橋点を有する化合物を架橋したもの等、任意である。


【0064】ただし、上記の3次元網目構造において、より高いイオン伝導率を実現するためには、ポリオキシアルキレンの分枝構造のようなエーテル結合を含む自由末端側鎖を有していることが好ましい。

【0065】第1の高分子化合物の架橋構造としては、エーテル結合、エステル結合、ウレタン結合等が挙げられるが、勿論これに限らず用途等に応じて任意の架橋構造を採用することができる。

【0066】このような第1の高分子化合物の具体例としては、下記の化6に示すジエステル化合物の重合体を挙げることができる。

[0067]

【化6】



(式中、 R_1 、 R_2 および R_3 は水素原子または炭素数 1~6 のアルキル基を示し、それぞれは同一であっても異なってもよい、また、 $x \geq 1$ かつ $y \geq 0$ または $x \geq 0$ かつ $y \geq 1$ である。)

【0068】この場合、上述したような自由末端側鎖を導入することを目的に、下記の化7に示すモノエステル化合物を併用することが好ましい。

※【0069】

【化7】

✕



(式中、 R_1 、 R_2 および R_3 は水素原子または炭素数 1~6 のアルキル基を示し、それぞれは同一であっても異なってもよい。また、 $X \geq 1$ かつ $Y \geq 0$ または $X \geq 0$ かつ $Y \geq 1$ である。)

【0070】そのときのジエステル化合物とモノエステル化合物の比率（モノエステル化合物／ジエステル化合物）は、重量比で5：0以下とすることが好ましい。

【0071】上記電解質に溶解（相溶）させる軽金属塩 40
には、リチウム、ナトリウム、アルミニウム等の軽金属
の塩を使用することができ、電池の種類に応じて便宜定
めることができる。

【0072】例えば、リチウム若しくはリチウムイオン二次電池を構成する場合には、 LiBF_4 , LiClO_4 , LiPF_6 , LiAsF_6 , $\text{CF}_3\text{SO}_2\text{Li}$, $(\text{C}_2\text{F}_5\text{SO}_2)_2\text{NLi}$, $\text{C}_6\text{F}_5\text{SO}_2\text{Li}$, $\text{CF}_3\text{CO}_2\text{Li}$, $(\text{CF}_3\text{CO})_2\text{NLi}$, $\text{C}_6\text{F}_5\text{SO}_2\text{Li}$, $\text{C}_6\text{F}_5\text{SO}_2\text{Li}$, $(\text{C}_2\text{F}_5\text{SO}_2)_2\text{NLi}$, $(\text{C}_6\text{F}_5\text{SO}_2)_2\text{NLi}$, $(\text{C}_6\text{F}_5\text{SO}_2)_2\text{NLi}$, $(\text{FSO}_2\text{C}_6\text{F}_5)$ (CF 50

SO_2)NLi, $(\text{CF}_3)_2\text{CHSO}_2$)NLi, $(\text{CF}_3\text{SO}_2)_2\text{CLi}$, $(\text{C}_6\text{F}_5(\text{CF}_3))_{2-3}$, BLi , LiCF_3 , LiAlCl_4 等のリチウム塩を使用することができる。

【0073】非水電解質電池は、上記正極、電解質の他、負極等の構成要素を備えるが、他の構成要素は従来のものと同様のものを用いることができる。

【0074】以下、ボタン型の電池を例にして、非水電解質電池の構成要素について説明する。

【0075】ボタン型の非水電解質電池1は、図1に示すように、負極2と、負極2を収容する負極缶3と、正極4と、正極4を収容する正極缶5と、正極4と負極2との間に配されたセパレータ6と、絶縁ガスカート7とを備え、電解質として電解液を用いる場合には、負極缶

13

3及び正極缶5内に非水電解液が充填されてなる。固体電解質やゲル電解質を用いる場合には、固体電解質層、ゲル電解質層を負極2や正極4の活物質層上に形成する。

【0076】負極2は、負極集電体上に、負極活物質を含有する負極活物質層が形成されてなる。負極集電体としては、例えばニッケル箔等が用いられる。

【0077】負極活物質としては、リチウムをドーブ/脱ドーブ可能なものを用い、具体的には、金属リチウム、リチウム合金、リチウムがドーブされた導電性高分子、層状化合物（炭素材料や金属酸化物など）等を用いる。

【0078】負極活物質層に含有される結合剤としては、この種の非水電解質電池の負極活物質層の結合剤として通常用いられている公知の樹脂材料等を用いることができる。負極活物質として例えば金属リチウム箔を用いた場合には、上記結合剤は不要である。

【0079】負極缶3は、負極2を収容するものであり、また、非水電解質電池1の外部端子（負極）となる。

【0080】正極4は、正極集電体上に、先に説明した $\text{Li}_x\text{M}_y\text{PO}_z$ （例えば LiFePO_4 ）を正極活物質として含有する正極活物質層が形成されてなる。

【0081】正極集電体としては、例えばアルミニウム箔等が用いられる。

【0082】正極活物質層に含有される結合剤としては、この種の非水電解質電池の正極活物質層の結合剤として通常用いられている公知の樹脂材料等を用いることができる。

【0083】正極缶5は、正極4を収容するものであり、やはり非水電解質電池1の外部端子（正極）となる。

【0084】セパレータ6は、正極4と、負極2とを離間させるものであり、この種の非水電解質電池のセパレータとして通常用いられている公知の材料を用いることができ、例えばポリプロピレンなどの高分子フィルムが用いられる。また、リチウムイオン伝導度とエネルギー密度との関係から、セパレータの厚みはできるだけ薄いことが必要である。具体的には、セパレータの厚みは例えば $50\mu\text{m}$ 以下が好ましい。なお、電解質として固体電解質、ゲル電解質を用いた場合には、このセパレータ6は必ずしも設けなくともよい。

【0085】絶縁ガasket7は、負極缶3に組み込まれ一体化されている。この絶縁ガasket7は、負極缶3及び正極缶5内に充填された非水電解液の漏出を防止するためのものである。

【0086】本発明に係る非水電解質電池は、一次電池であってもよいし、二次電池であってもよい。また、円筒型、角型、コイン型、ボタン型等、その形状については特に限定されることはなく、薄型、大型等、任意のサ

(8)

特開2001-110455

14

イズとすることができる。

【0087】

【実施例】以下、本発明の非水電解質電池について、具体的な実験結果に基づいて説明する。

【0088】ここでは、オリビン型 LiFePO_4 を正極活物質とする非水電解質二次電池を作製した。

【0089】 LiFePO_4 を合成するには、まず、結晶子サイズの大きい原料のリン酸二水素アンモニウム（ $\text{NH}_4\text{H}_2\text{PO}_4$ ）を予め十分に粉砕した。次に、酢酸鉄（ $\text{Fe}(\text{CH}_3\text{COO})_3$ ）と、リン酸二水素アンモニウム（ $\text{NH}_4\text{H}_2\text{PO}_4$ ）と、炭酸リチウム（ Li_2CO_3 ）とを、モル比が2:2:1になるように十分に混合して前駆体とした。

【0090】次に、窒素雰囲気下、前駆体を 320°C で12時間の仮焼きを行った後、窒素雰囲気下、前駆体を 550°C で24時間加熱することにより LiFePO_4 を合成した。

【0091】上述したような方法により合成された LiFePO_4 について、粉末X線回折パターンを測定した。粉末X線回折の測定条件は下記の通りである。

【0092】

使用装置：リガクRINT2500回転対称極

X線： $\text{CuK}\alpha$ 、40kV、100mA

ゴニオメータ：縦型標準、半径185mm

カウンタモノクロメータ：使用

フィルタ：使用しない

スリット幅：

ダイバージェントスリット（DS）＝ 1°

レシービングスリット（RS）＝ 1°

30 スキャッタリングスリット（SS）＝1.5mm

計数装置：シンチレーションカウンタ

測定法：反射法、連続スキャン

走査範囲： $2\theta=10^\circ\sim80^\circ$

スキャンスピード： $4^\circ/\text{分}$

測定された粉末X線パターンを図2に示す。合成された LiFePO_4 においては、生成物中に LiFePO_4 以外の不純物の存在は確認されず、単相の LiFePO_4 が得られていることがわかる。

【0093】そこで次に、上述のようにして得られた LiFePO_4 を正極活物質として用いて電池を作製した。

【0094】まず、正極活物質（乾燥した LiFePO_4 ）70重量%と、導電剤（アセチレンブラック）25重量%と、結着剤（ポリフッ化ビニリデン）5重量%とを秤取し、これを溶媒（ジメチルホルムアミド）中に投入して均一に混合し、ペースト状の正極合剤を調製した。なお、ポリフッ化ビニリデンには、アルドリッチ社製の#1300を用いた。

【0095】次に、この正極合剤を集電体となるアルミニウムメッシュ上に塗布し、乾燥アルゴン雰囲気下、1

15

00℃で1時間乾燥して正極活物質層を形成した。

【0096】そして、正極活物質層が形成されたアルミニウムメッシュを、直径15mmの円板状に打ち抜くことによりペレット状の正極とした。なお、この正極1個には60mgの活物質が担持されている。

【0097】次に、リチウム金属箔を正極と略同形に打ち抜くことにより負極とした。

【0098】次いで、シロキサン1kgに対して1モルの $\text{LiN}(\text{CF}_3\text{SO}_2)_2$ を溶解させることにより非水電解液を調製した。

【0099】以上のようにして得られた正極を正極缶に収容し、負極を負極缶に収容し、正極と負極との間にセパレータを配した。正極缶及び負極缶内に非水電解液を注入し、正極缶と負極缶とをかしめて固定することにより、2025型のコイン型テストセルを作製した。

【0100】このテストセルについて、充放電試験を行った。テストセルに対して4.0Vまでの定電流充電を行った後、放電を行い、電池電圧が2.5Vまで低下した時点を放電終了とした。なお、充電、放電ともに常温(23℃)で行い、充電、放電ともに電流密度は 0.1×20

(9)

特開2001-110455

16

* 2 mA/cm^2 とした。

【0101】充放電特性を図3に示す。図3より、本実施例のテストセルは良好な充放電特性を有することがわかる。

【0102】

【発明の効果】以上の説明からも明らかなように、本発明によれば、電池特性、経済性、環境対応性、安全性の全てにおいて優れた非水電解質電池を実現することができ、実用上の利点は大きい。

10 【0103】また、本発明の非水電解質電池は、従来のリチウムイオン電池よりも電圧が低めに設定されるため、IC等の駆動電圧の低下にも対応することができる。


【図面の簡単な説明】

【図1】非水電解質電池の一構成例を示す概略断面図である。


【図2】合成された LiFePO_4 の粉末X線回折パターンを示す図である。

【図3】作製されたテストセルの充放電特性を示す特性図である。


【図1】

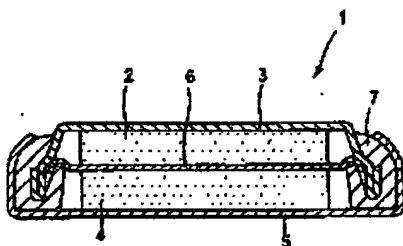

【図3】

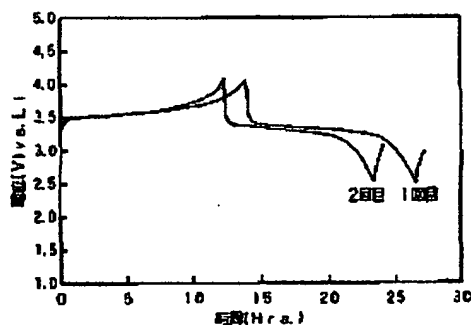

【図2】

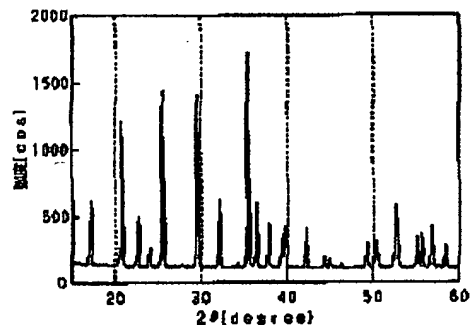

(10)

特開2001-110455

フロントページの続き

(51)Int.Cl.

識別記号

F I

キーワード(参考)

H 0 1 M 6/18

H 0 1 M 6/18

E

(72)発明者 山田 心一郎

東京都品川区北品川6丁目7番35号 ソニ

ー株式会社内

(72)発明者 野田 和宏

東京都品川区北品川6丁目7番35号 ソニ

ー株式会社内

Fターム(参考) SH003 AA03 AA04 AA10 BB05 BC06

BD00 BD02

SH014 AA02 EE10 HH00 HH06

SH024 AA12 CC03 FF11 FF15 FF16

FF17 FF18 FF21 FF32 FF38

GG01

SH029 AJ07 AJ12 AK03 AK05 AK16

AL02 AL06 AL12 AL16 AM02

AM03 AM04 AM05 AM07 AM16

BJ03 BJ12 DJ17 EJ03 HJ02

HJ05

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.




1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

CLAIMS

[Claim(s)]

[Claim 1] It is [occlusion, the negative electrode to emit, and] a general formula Li_xMyPO_4 (however, $0 < x \leq 2$ and y of x are $0.8 \leq y \leq 1.2$ among a formula.) in reversible about a lithium. Moreover, M is a component containing 3d transition metals. It is the nonaqueous electrolyte cell which is equipped with the positive electrode containing the compound expressed, and an electrolyte, and is characterized by the above-mentioned electrolyte containing the siloxane derivative expressed with following ** 1.

[Formula 1]

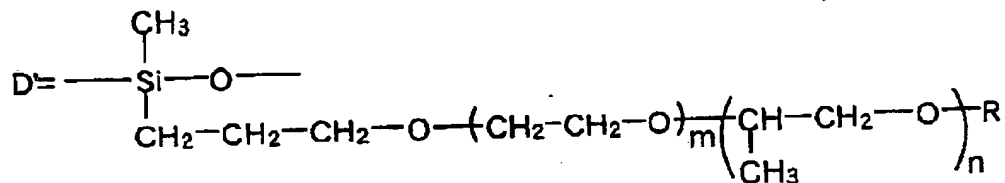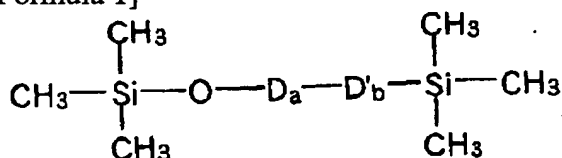

(式中、aは0から100の整数を表し、bは1から100の整数を表し、mは0から100の整数を表し、nは0から100の整数を表し、Rは水素原子又はアルキル基を表す。ただし、b>1のときは、b個のD'は同じでも異なってもよい。D'及びRに含まれる水素原子はハロゲン原子で置き換えられていてもよい。)

[Claim 2] For the above-mentioned positive electrode, a particle diameter is Li_xMyPO_4 10 micrometers or less. Nonaqueous electrolyte cell according to claim 1 characterized by containing.

[Claim 3] Li_xMyPO_4 contained in the above-mentioned positive electrode Nonaqueous electrolyte cell according to claim 1 characterized by the diameter of volume accumulation being 1 micrometer or less 10%.

[Claim 4] the above Li_xMyPO_4 LiFePO_4 it is -- nonaqueous electrolyte cell according to claim 1 characterized by things

[Claim 5] The above-mentioned electrolyte is a nonaqueous electrolyte cell according to claim 1

characterized by one sort in these high molecular compounds being the above-mentioned siloxane derivative including two or more sorts of high molecular compounds which can form both the half-invasion type macromolecule network structure mutually.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.

2. **** shows the word which can not be translated.

3. In the drawings, any words are not translated.

DETAILED DESCRIPTION

[Detailed Description of the Invention]

[0001]

[The technical field to which invention belongs] this invention relates to the nonaqueous electrolyte cell which makes the compound which has order type olivine structure a positive active material.

[0002]

[Description of the Prior Art] In recent years, research of the rechargeable battery in which a recharge is possible is advanced as a cell which can be used conveniently [for a long time] and economically with fast progress of various electronic equipment. As a typical rechargeable battery, the lead accumulator, the alkaline battery, the lithium secondary battery, etc. are known.

[0003] Also in the above rechargeable batteries, especially the lithium secondary battery has advantages, such as high power and high-energy density. A lithium secondary battery consists of occlusion, the negative electrode and positive electrode which have the active material which can be emitted, and nonaqueous electrolyte in reversible in a lithium ion.

[0004] And generally as a negative-electrode active material of a lithium secondary battery, a conductive polymer, stratified compounds, etc. (carbon-material metallurgy group oxide etc.) with which the metal lithium, the lithium alloy, and the lithium were doped are used.

[0005] moreover, as a positive active material, a metallic oxide, metallic sulfide, or polymer uses -- having -- Ti_2S , MoS_2 and NbSe_2 , and V_2O_5 etc. -- the non-** lithium compound and the multiple oxide containing Li like Li_xMO_2 ($\text{M}=\text{Co}$, nickel, Mn, Fe, etc.) are proposed [for example,]

[0006]

[Problem(s) to be Solved by the Invention] By the way, in the above-mentioned lithium secondary battery, various technical problems are left behind and those improvements are demanded.

[0007] For example, LiCoO_2 which has the potential of pair Li4V from a viewpoint that high-energy density and the high voltage are obtained in the conventional lithium secondary battery It is widely put in practical use as a positive electrode. LiCoO_2 In respect of being various, although it is an ideal positive-electrode material, Co is unevenly distributed as resources on the earth, and since it is rare, it requires great cost, and it has the problem that a problem is in adequate supply, and development of the positive-electrode material replaced with this is desired.

[0008] In the present condition, LiMn_2O_4 (space group $\text{Fd}\bar{3}\text{m}$) which has normal-spinel type structure is the positive-electrode material of the 4V class only Mn base, from the point of the easy synthesis method and cell capacity, is very promising and is already put in practical use in part.

[0009] However, when the application to a real cell is considered, it is left behind while the problem about stability, such as capacity degradation at the time of elevated-temperature preservation and the dissolution into the electrolytic solution of Mn, and the problem about a cycle property have been still more nearly unsolved.

[0010] Moreover, although it is abundant in [Mn] resources, and it will be thought that it is very useful if the positive-electrode material which carried out the low Fe at the base for [Mn / Co, nickel,] whether being ** also about toxicity is realizable, property sufficient in an old examination is not acquired. Until now, it is LiCoO_2 . LiNiO_2 LiFeO_2 which has similar structure Although examination of material considered as basic composition has been carried out to the center, structure is unstable and only the inadequate property is completely realized as a positive active material for rechargeable batteries in the top where production is difficult.

[0011] On the other hand, also about the electrolytic solution, conventionally, the inflammable organic solvent is used and it has left various problems. For example, a high current flows and generates heat rapidly at the time of an unprepared short circuit, the electrolytic solution causes evaporation and decomposition by this, and there is a problem of generating gas. Generating of such gas may lead to breakage, destruction, etc. of a cell.

[0012] Management of preparing the relief valve and current interrupting device which cleave by elevation of cell internal pressure as the solution method is made.

[0013] However, in improvement of such a structure and a mechanism, it does not restrict that any problems can be coped with, but a radical improvement of cell material is needed.

[0014] Then, this invention aims at offering the nonaqueous electrolyte cell which can reduce the problem of environmental correspondence nature or safety, being proposed in view of this conventional actual condition, and realizing high-capacity-izing and low-cost-ization.

[0015]

[Means for Solving the Problem] In order to attain the above-mentioned purpose, this invention is [occlusion, the negative electrode to emit, and] a general formula Li_xMyPO_4 (however, $0 < x \leq 2$ and y of x are $0.8 \leq y \leq 1.2$ among a formula.) in reversible about a lithium. Moreover, M is a component containing 3d transition metals. It has a positive electrode containing the compound expressed, and an electrolyte, and the above-mentioned electrolyte is characterized by containing a siloxane derivative.

[0016] Fe is abundant for whether it being ** in resources compared with elements, such as Co, nickel, and Mn, and its price is also cheap, and it is nonpoisonous so that it may be known well -- it is harmless Furthermore, Si which is the principal component of a siloxane derivative, and existing very abundantly on the earth are also known well.

[0017] therefore, LiFePO_4 from -- by combining the becoming positive-electrode material and the electrolyte containing a siloxane derivative, a low electrochemistry device is extremely realized for an environmental load or toxicity by the low cost

[0018] Furthermore, chemical stability is high, by using for electrolyte material the siloxane which is the inorganic polymer of fire-resistant and low vapor pressure, evaporation of the electrolytic solution and decomposition are suppressed, breakage of a cell and the danger of ignition are also suppressed simultaneously, and the outstanding cell performance is attained.

[0019] In addition, LiFePO_4 Since covalent bond of the oxygen is firmly carried out to P, maceration cannot happen very easily and it has the feature of being hard to carry out induction of the combustion reaction. Therefore, the property of the fire retardancy and low vapor pressure which the above-mentioned siloxane derivative has, and a cell system with safety high conjointly very are built.

[0020]

[Embodiments of the Invention] Hereafter, the composition of the nonaqueous electrolyte cell which applied this invention is explained in detail, referring to a drawing.

[0021] The nonaqueous electrolyte cell of this invention is equipped with a positive electrode, a negative electrode, and an electrolyte as a fundamental component.

[0022] (And the compound Li_xMyPO_4 (however, $0 < x \leq 2$ and y of x are $0.8 \leq y \leq 1.2$ among a formula.) which has olivine structure as a positive active material first in this invention, i.e., a general formula) Moreover, M is a component containing 3d transition metals. The compound expressed is used.

[0023] As a compound expressed with Li_xMyPO_4 , $\text{Li}_x\text{Fe}_y\text{PO}_4$, $\text{Li}_x\text{Mn}_y\text{PO}_4$, $\text{Li}_x\text{Co}_y\text{PO}_4$, $\text{Li}_x\text{Ni}_y\text{PO}_4$, $\text{Li}_x\text{Cu}_y\text{PO}_4$, $\text{Li}_x(\text{Fe}, \text{Mn})_y\text{PO}_4$, $\text{Li}_x(\text{Fe}, \text{Co})_y\text{PO}_4$, $\text{Li}_x(\text{Fe}, \text{nickel})_y\text{PO}_4$, $\text{Li}_x(\text{Cu}, \text{Mn})_y\text{PO}_4$, $\text{Li}_x(\text{Cu}, \text{Co})_y\text{PO}_4$, and $\text{Li}_x(\text{Cu}, \text{nickel})_y\text{PO}_4$ grade are mentioned, for example. In addition, in each compound, the composition ratio of the element in a parenthesis is arbitrary.

[0024] For example, LiFePO_4 Volume density is 3.6 g/cm^3 . It is large, and the high potential of 3.4 V is generated and geometric capacity is also as large as 170 mAh/g . And LiFePO_4 It is an initial state, and electrochemically, since one Li in which a ** dope is possible is included per Fe atom, capacity is very high as a positive active material of a lithium ion battery. Moreover, it is this LiFePO_4 so that it may mention later. It is compoundable by the simple method.

[0025] however, the above LiFePO_4 LiFePO_4 obtained by the old synthesis method when it is going

to use as a positive active material of an actual cell **** -- only about [60 mAh/g-70 mAh/g] actual capacity is obtained, but actual capacity of about 120 mAh/g is realized at the maximum -- it is not unlike too much. Considering that geometric capacity is 170 mAh/g, it is hard to say that sufficient capacity is attained.

[0026] for example, LiFePO₄ the case where LiMn 2O₄ is compared -- LiMn 2O₄ -- average voltage -- 3.9V -- it is -- the capacity of 120 mAh/g -- having -- further -- volume density -- 4.2g/cm³ it is -- since -- LiFePO₄ As compared with LiMn 2O₄, voltage and volume density will be small about ten percent. For this reason, LiFePO₄ which has the capacity of the same 120 mAh/g It will become small twenty percent or more with a volume energy density ten percent or more with a weight energy density rather than LiMn 2O₄.

[0027] Therefore, LiFePO₄ It is LiFePO₄ although 140 mAh/g or the capacity beyond it is required in order to realize LiMn 2O₄, equivalent level, or the energy density beyond it. Such high capacity is not realized until now.

[0028] Moreover, LiFePO₄ It is conventionally compounded by [of 800 degrees C] being comparatively heated at an elevated temperature under reduction environment using the salt of the divalent iron of iron acetate Fe(CH₃COO)₂ grade as a source of Fe used as a synthetic powder. When the heating temperature at the time of composition is high, the load which will consume the part energy and is given to a reactor etc. is also large.

[0029] Furthermore, LiFePO₄ compounded by [of 800 degrees C] being comparatively heated at an elevated temperature Crystallization will advance superfluously. For this reason, it is LiFePO₄ when it uses for the positive active material of a nonaqueous electrolyte cell. Diffusion of the lithium within a particle does not fully take place, but there is a possibility that a capacity high enough cannot be obtained.

[0030] That these problems should be solved, as a result of repeating various examination, it is LixMyPO₄. If carried out, it turns out that it is good to use the thing containing that whose particle diameter is 10 micrometers or less. LixMyPO₄ which a positive active material contains LixMyPO₄ whose particle diameter it carries out and is 10 micrometers or less Since particle size distribution are not suitable when it does not contain, what the lithium which is a charge carrier cannot fully diffuse in the particle of a positive active material is conjectured.

[0031] Moreover, LixMyPO₄ It is desirable that the diameter of 10% volume accumulation is 1 micrometer or less. It is LixMyPO₄ when the diameter of 10% volume accumulation is larger than 1 micrometer. There is a possibility that crystallization may advance too much and a giant particle may occupy most. Thus, when crystallization advances too much, there is a possibility that the lithium which is a charge carrier cannot be smoothly spread in the particle of a positive active material.

[0032] LixMyPO₄ which has the above particle size distributions, for example, LiFePO₄, Below, as it is shown below, it compounds.

[0033] First, iron acetate (Fe₂ (CH₃COO)), phosphoric-acid hydrogen ammonium (NH₄H₂PO₄), and a lithium carbonate (Li₂CO₃) are mixed by the predetermined ratio as a synthetic powder, and it considers as a precursor. Here, mixture of a synthetic powder is fully performed. Since each raw material is mixed uniformly and a point of contact increases by fully mixing a synthetic powder, it is LiFePO₄ at low temperature from the former. It becomes possible to compound.

[0034] Next, it is LiFePO₄ by heating this precursor at predetermined temperature among inert gas atmosphere, such as nitrogen. It is compounded.

[0035] The former and LiFePO₄ For example, it was compounded at the comparison-elevated temperature of 800 degrees C. When the temperature at the time of composition was high, the load which will consume the part energy and is given to a reactor etc. was also large.

[0036] Then, by fully mixing a synthetic powder, considering as a precursor, and compounding by heating in a nitrogen air current, it compares with conventional 800 degrees C of 300 degrees C, and is LiFePO₄ at low temperature far. It becomes possible to compound. That is, it compares with the former and is LiFePO₄ at a latus temperature requirement more. It becomes possible to compound and the width of face of selection of the temperature at the time of composition spreads.

[0037] this invention person is LiFePO₄. The temperature (synthetic temperature is called hereafter.) which heats a precursor in case it compounds, and LiFePO₄ The synthetic temperature of optimal

LiFePO₄ was examined paying attention to the relation with the capacity of the cell used as an active material.

[0038] Consequently, LiFePO₄ Synthetic temperature was understood that it is desirable to consider as the range of 400 degrees C or more and 700 degrees C or less. As for synthetic temperature, it is more desirable that it is the range of 400 degrees C or more and 600 degrees C or less.

[0039] LiFePO₄ Crystallization does not fully progress with a low and a chemical reaction rather than 400 degrees C, but synthetic temperature is uniform LiFePO₄. It cannot obtain. Moreover, when the synthetic temperature of LiFePO₄ is higher than 700 degrees C, crystallization advances superfluously and there is a possibility that a deposit of an impurity may not be suppressed.

[0040] In addition, in the manufacture method mentioned above, before carrying out heating composition of the precursor, it is desirable to remove beforehand the air which performs deairation processing to a precursor and is contained in a precursor.

[0041] It is LiFePO₄ when air remains in a precursor. At the time of composition, Fe²⁺ in the iron acetate which is a divalent iron compound will oxidize by the oxygen in air, and will turn into Fe³⁺. Consequently, the trivalent iron compound which is an impurity is LiFePO₄ of a product. It will mix in inside. By removing the air beforehand contained by deairation processing in a precursor, oxidization of Fe²⁺ in iron acetate can be prevented. Consequently, a trivalent iron compound is LiFePO₄ of a product. It does not mix in inside but is LiFePO₄ of single phase. It can obtain.

[0042] LiFePO₄ Although various raw materials, such as a lithium hydroxide, a lithium nitrate, an acetic-acid lithium, a phosphoric-acid lithium, the first iron of a phosphoric acid, and a ferrous oxide, can be used as a synthetic powder besides the compound mentioned above, in order [which is called 400 degrees C or more and 700 degrees C or less] to compound at low temperature comparatively, it is desirable to use a reactant high raw material.




[0043] By the manufacture method which was mentioned above, since a synthetic powder is mixed, it considers as a precursor and this precursor is heated at the temperature of 400 degrees C or more and 700 degrees C or less, a chemical reaction and crystallization advance uniformly and crystallization does not advance too much. Thereby, there is no impurity and it is LiFePO₄ of single phase. It is obtained. Thus, LiFePO₄ compounded It will be LiFePO₄ if it uses as a positive active material. The high actual capacity for which 170 mAh/g which is geometric capacity is pressed is realizable.

[0044] in addition, LiFePO₄ which mentioned the above-mentioned manufacture method above not only -- general formula LixMyPO₄ It is applied also to the compound expressed.

[0045] On the other hand, in this invention, the siloxane derivative in which an electrolyte is shown by following ** 2 is contained.

[0046]

[Formula 2]

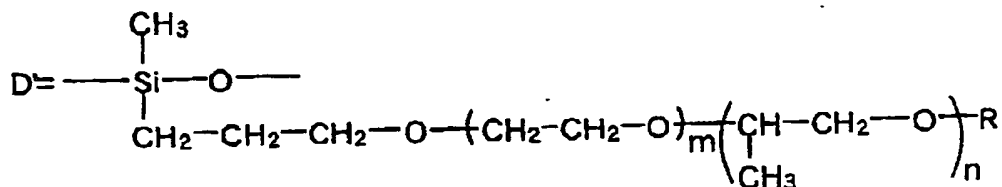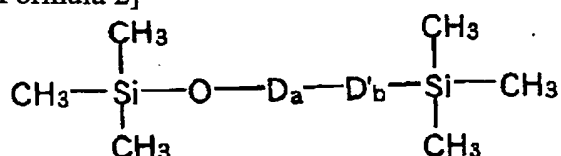


(式中、aは0から100の整数を表し、bは1から100の整数を表し、m

は0から100の整数を表し、nは0から100の整数を表し、Rはハロゲン原子又はアルキル基を表す。ただし、 $b > 1$ のときは、b個のD'は同じでも異なってもよい。D'及びRに含まれる水素原子はハロゲン原子で置き換えられていてもよい。)

[0047] The siloxane derivative which specifically has structure as shown in following ** 3 --izing 5 can be used.



[0048]

[Formula 3]

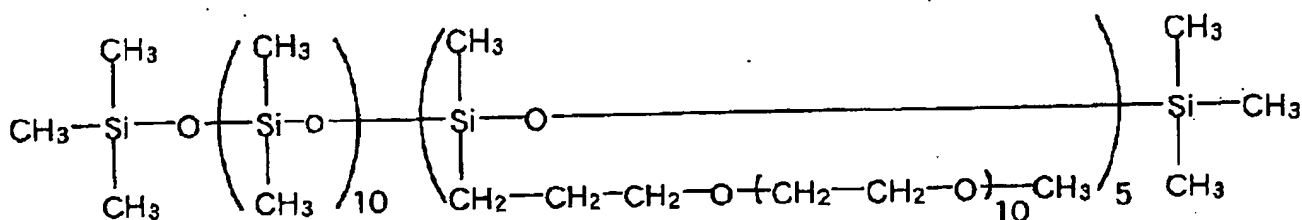


[0049]

[Formula 4]

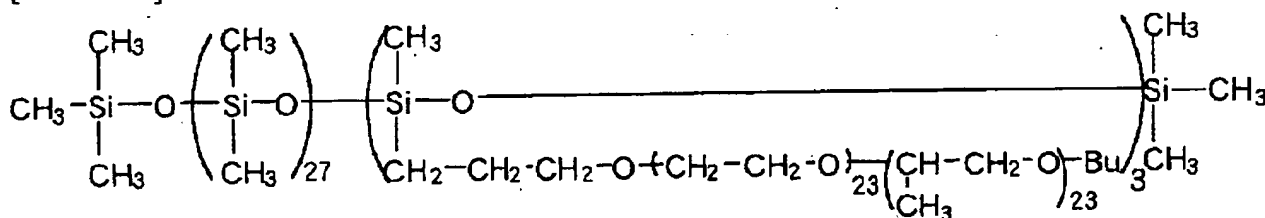

[0050]

[Formula 5]

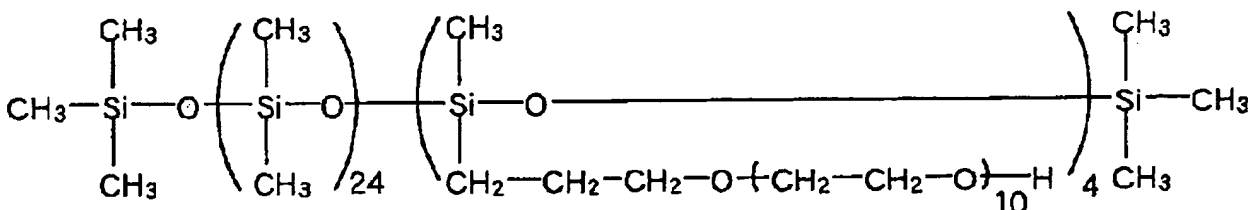

[0051] It is the shape type siloxane derivative of a chain with which it had the chain combination of a silicon and oxygen in the basic skeleton, and the univalent organic machine was added to the silicon as a side chain, its chemical stability is high, and since the above-mentioned siloxane derivative is low vapor pressure in fire retardancy, it is an inorganic polymer which is excellent also in thermochemical stability.

[0052] An electrolyte may be the so-called liquefied electrolytic solution, and may be a solid electrolyte and a gel electrolyte.

[0053] When making an electrolyte into the electrolytic solution, viscosity is a low solution-like comparatively, and a siloxane derivative is asked for the structure where a light metal salt may be

dissolved. That is, coefficients of kinematic viscosity [in / the temperature of 25 degrees C / in a siloxane derivative] are below 5000cSt(s) (centistokes), and it is called for that average molecular weight is 10000 or less.

[0054] Furthermore, it is more desirable that the conductivity in the temperature of 25 degrees C is - one or more 0.1 mS-cm as the electrolytic solution.

[0055] The proper viscosity which can be equal to use as the electrolytic solution, and the solubility suitable for mixture become possible by choosing moderately the side chain of the monomer unit D in the siloxane derivative shown by ** 2, and D'. As for especially the side chain of monomer unit D', it is advantageous to include ether linkage. Moreover, the hydrogen in D, D', and Substituent R may be replaced by halogens, such as a fluorine and boron.

[0056] As a non-aqueous solvent of the electrolytic solution, propylene carbonate, ethylene carbonate, butylene carbonate, vinylene carbonate, gamma-butyrolactone, a sulfolane, 1, 2-dimethoxyethane, 1, 2-diethoxy ethane, 2-methyl tetrahydrofuran, the 3-methyl 1, 3-dioxolane, a methyl propionate, a methyl butyrate, dimethyl carbonate, diethyl carbonate, dipropyl carbonate, etc. can be used, for example. It is desirable to use chain-like carbonate, such as annular carbonate, such as propylene carbonate and vinylene carbonate, dimethyl carbonate, diethyl carbonate, and dipropyl carbonate, from the point of voltage stability especially. Moreover, such a non-aqueous solvent may be used independently, two or more kinds may be mixed and one kind may be used for it.

[0057] Solid electrolyte (the perfect solid electrolyte which does not contain a solvent at all is included.) As polymeric materials to be used, silicon gel, acrylic gel, acrylonitrile gel, As fluorine system polymer, such as poly force FAZEN conversion polymer, a polyethylene oxide, polypropylene oxide and these compound polymer, and a crosslinked polymer, conversion polymer For example, poly (vinylidene full aurora id) and poly (vinylidene full aurora id-co-hexafluoropropylene), Although such mixture can carry out various use of poly (vinylidene full aurora id-co-tetrafluoroethylene), poly (vinylidene full aurora id-co-truffe RUORO ethylene), etc., of course, it is not limited to these.

[0058] Moreover, it is good also considering the constituent which consists of two or more sorts of high molecular compounds which can form both the half-invasion type macromolecule network structure mutually as matrix polymer of a solid electrolyte or a gel electrolyte.

[0059] Among these, it is the 1st high molecular compound with which the bridge was constructed over the compound with which at least one sort of high molecular compounds have chemically the functional group which can construct a bridge in the point concerned constructing a bridge, and at least one sort of other high molecular compounds are the 2nd high molecular compound which does not have the functional group which can construct a bridge but dissolves a light metal salt, i.e., the above-mentioned siloxane derivative.

[0060] The siloxane derivative which is the 2nd high molecular compound will be compatible [in the basic skeleton of the 3-dimensional network structure of the 1st high molecular compound] of this constituent.

[0061] Generally, since the bridge is constructed over the 1st high molecular compound, although a mechanical strength is strong, a molecular motion is suppressed by bridge formation, dissolved mobility of ion becomes small, and it has the property in which ionic conductivity is small. On the other hand, since a bridge is not constructed over the 2nd high molecular compound, although its momentum of a molecule is high, and its glass transition temperature is also low and it has high ionic conductivity, it has the property to be inferior to a mechanical strength.

[0062] Here, the 1st high molecular compound and 2nd high molecular compound form both the half-invasion type macromolecule network structure, and those advantages (a strong mechanical strength and high ion conductivity) are employed efficiently, respectively. That is, in both the half-invasion type macromolecule network structure, between the 1st high molecular compound and the 2nd high molecular compound, a chemical bond does not arise substantially and the molecular motion of the 2nd high molecular compound is not suppressed. Moreover, the synergistic effect that crystallization of the 2nd high molecular compound stops being able to happen easily is also added, and ion conductivity higher than a case high-molecular-compound independent [each] is obtained by the latus temperature requirement. Furthermore, a strong mechanical strength is obtained according to the 3-dimensional network structure which the 1st high molecular compound constitutes.

[0063] As the 3-dimensional network structure by bridge formation, what constructed the bridge in the both ends of a straight chain-like compound or the compound of the letter of branching and the piece end, the thing which constructed the bridge in the compound which has a point constructing a bridge in a side chain are arbitrary.


[0064] However, in the above-mentioned 3-dimensional network structure, in order to realize higher ionic conductivity, it is desirable to have the free end side chain including ether linkage like the branching structure of polyoxyalkylene.

[0065] As the structure of cross linkage of the 1st high molecular compound, although ether linkage, ester combination, a urethane bond, etc. are mentioned, of course not only according to this but a use etc., the arbitrary structure of cross linkage is employable.

[0066] The polymer of the diester compound shown in following ** 6 as an example of such 1st high molecular compound can be mentioned.

[0067]

[Formula 6]




(式中、 R_1 、 R_2 および R_3 は水素原子または炭素数 1 ~ 6 のアルキル基を示し、それぞれは同一であっても異なってもよい。また、 $x \geq 1$ かつ $y \geq 0$ または $x \geq 0$ かつ $y \geq 1$ である。)

[0068] In this case, it is desirable to use together the monoester compound shown in following ** 7 for the purpose of introducing a free end side chain which was mentioned above.

[0069]

[Formula 7]



(式中、 R_4 、 R_5 および R_6 は水素原子または炭素数 1 ~ 6 のアルキル基を示し、それぞれは同一であっても異なってもよい。また、 $x \geq 1$ かつ $y \geq 0$ または $x \geq 0$ かつ $y \geq 1$ である。)

[0070] As for the ratio (a monoester compound / diester compound) of the diester compound at that time, and a monoester compound, it is desirable to carry out to 5.0 or less by the weight ratio.

[0071] The salt of light metals, such as a lithium, sodium, and aluminum, can be used for the light metal salt dissolved in the above-mentioned electrolyte (compatibility), and it can set to it expedient according to the kind of cell.

[0072] for example, in constituting a lithium or a rechargeable lithium-ion battery LiBF_4 , LiClO_4 , LiPF_6 , LiAsF_6 , $\text{CF}_3\text{SO}_3\text{Li}$, 2NLi , $\text{C}_4\text{F}_9\text{SO}_3\text{Li}$, $\text{CF}_3\text{CO}_2\text{Li}$, $(\text{CF}_3\text{SO}_2)_2\text{NLi}$, $\text{C}_6\text{F}_5\text{SO}_3\text{Li}$, $\text{C}_8\text{F}_{17}\text{SO}_3\text{Li}$, $(\text{CF}_3\text{CO}_2)_2\text{NLi}$ and $\text{NLi}(\text{s})$ ($\text{CF}(\text{C}_4\text{F}_9\text{SO}_2)_3\text{SO}_2$), $(\text{C}_2\text{F}_5\text{SO}_2)_2$ -- $(\text{FSO}_2\text{C}_6\text{F}_4)_2$ NLi , $2(2(\text{CF}_3)\text{CHOSO}_2)\text{NLi}$, $3(\text{CF}_3\text{SO}_2)\text{CLi}$, and 4 $(3\text{C}_6\text{F}_3(\text{CF}_3)_2-5)$ -- the lithium salt of BLi, LiCF_3 , and LiAlCl_4 grade can be used (CF_3SO_2)

[0073] Although a nonaqueous electrolyte cell is equipped with components, such as a negative electrode besides the above-mentioned positive electrode and an electrolyte, other components can use the conventional thing and the same thing.

[0074] Hereafter, a button type cell is made into an example and the component of a nonaqueous electrolyte cell is explained.

[0075] In equipping the button type nonaqueous electrolyte cell 1 with the separator 6 allotted between the positive-electrode can 5 which holds a negative electrode 2, the negative-electrode can 3 which holds a negative electrode 2, a positive electrode 4, and a positive electrode 4 as shown in drawing 1, and a positive electrode 4 and a negative electrode 2, and an insulating gasket 7 and using the electrolytic solution as an electrolyte, it comes to fill up nonaqueous electrolyte in the negative-

electrode can 3 and the positive-electrode can 5. In using a solid electrolyte and a gel electrolyte, it forms a solid electrolyte layer and a gel electrolyte layer on the active material layer of a negative electrode 2 or a positive electrode 4.

[0076] It comes to form the negative-electrode active material layer to which a negative electrode 2 contains a negative-electrode active material on a negative-electrode charge collector. As a negative-electrode charge collector, a nickel foil etc. is used, for example.

[0077] As a negative-electrode active material, a conductive polymer, stratified compounds, etc. (carbon-material metallurgy group oxide etc.) with which the metal lithium, the lithium alloy, and the lithium were specifically doped using the thing in which a dope / ** dope is possible in the lithium are used.

[0078] As a binder contained in a negative-electrode active material layer, a well-known resin material usually used as a binder of the negative-electrode active material layer of this kind of nonaqueous electrolyte cell can be used. When for example, a metal lithium foil is used as a negative-electrode active material, the above-mentioned binder is unnecessary.

[0079] The negative-electrode can 3 holds a negative electrode 2, and serves as an external terminal (negative electrode) of the nonaqueous electrolyte cell 1.

[0080] It comes to form the positive-active-material layer which contains Li_xMyPO_4 (for example, LiFePO_4) which explained the positive electrode 4 previously on the positive-electrode charge collector as a positive active material.

[0081] As a positive-electrode charge collector, an aluminum foil etc. is used, for example.

[0082] As a binder contained in a positive-active-material layer, a well-known resin material usually used as a binder of the positive-active-material layer of this kind of nonaqueous electrolyte cell can be used.

[0083] The positive-electrode can 5 holds a positive electrode 4, and serves as an external terminal (positive electrode) of the nonaqueous electrolyte cell 1 too.

[0084] Separator 6 can make a positive electrode 4 and a negative electrode 2 able to estrange, and a well-known material usually used as separator of this kind of nonaqueous electrolyte cell can be used, for example, high polymer films, such as polypropylene, are used. Moreover, the thickness of the relation between lithium ion conductivity and an energy density to separator needs a thing thin as much as possible. Specifically, the thickness of separator has desirable 50 micrometers or less. In addition, when a solid electrolyte and a gel electrolyte are used as an electrolyte, it is not necessary to necessarily form this separator 6.

[0085] The insulating gasket 7 is incorporated and united with the negative-electrode can 3. This insulating gasket 7 is for preventing exsorption of the nonaqueous electrolyte with which it filled up in the negative-electrode can 3 and the positive-electrode can 5.

[0086] The nonaqueous electrolyte cell concerning this invention may be a primary cell, and may be a rechargeable battery. Moreover, it is not limited especially about the configuration and let cylindrical, a square shape, a coin type, a button type, etc. be a thin shape, large-sized **, and arbitrary sizes.

[0087]

[Example] Hereafter, the nonaqueous electrolyte cell of this invention is explained based on a concrete experimental result.

[0088] Here, it is olivine type LiFePO_4 . The nonaqueous electrolyte rechargeable battery made into a positive active material was produced.

[0089] LiFePO_4 In order to have compounded, the phosphoric-acid 2 hydrogen ammonium ($\text{NH}_4\text{H}_2\text{PO}_4$) of a raw material with large microcrystal size was fully ground beforehand first. Next, it fully mixed and iron acetate ($\text{Fe}_2(\text{CH}_3\text{COO})$), phosphoric-acid 2 hydrogen ammonium ($\text{NH}_4\text{H}_2\text{PO}_4$), and the lithium carbonate (Li_2CO_3) were used as the precursor so that a mole ratio might be set to 2:2:1.

[0090] Next, it is LiFePO_4 by heating a precursor at 550 degrees C under nitrogen-gas-atmosphere mind for 24 hours, after performing temporary baking of 12 hours for a precursor at 320 degrees C under nitrogen-gas-atmosphere mind. It compounded.

[0091] LiFePO_4 compounded by method which was mentioned above ***** -- the powder X diffraction pattern was measured The measurement conditions of a powder X diffraction are as

follows.

[0092]

used equipment: -- Rigaku RINT2500 rotating-target X-ray: -- 40kV of CuKalpha, the slit width:diver Gent (slit DS) =1 degree RESHIBINGU (slit RS) =1 degree (scattering slit SS) =1.5mm counter:scintillation counter measuring method:reflection methods of which a vertical-mold standard and 100mA goniometer:radius counter monochromator [of 185mm]:use filter:use are not done, and the powder X-ray patterns measured by continuation scan scanning-zone:2 theta= 10 degrees - 80 degree scan speed:4 degree Compounded LiFePO4 It sets and is LiFePO4 in a product. It is not checked but existence of the impurity of an except is LiFePO4 of single phase. It turns out that it is obtained.

[0093] LiFePO4 which is there, next was obtained as mentioned above It used as a positive active material and the cell was produced.

[0094] first, 70 % of the weight (dry LiFePO4) of positive active materials and an electric conduction agent (acetylene black) -- 25 % of the weight and 5 % of the weight (polyvinylidene fluoride) of binders -- ****(ing) -- this -- the inside of a solvent (dimethylformamide) -- supplying -- uniform -- mixing -- a paste-like positive electrode -- the mixture was prepared In addition, Aldrich 1300 [#] were used for the polyvinylidene fluoride.

[0095] next, this positive electrode -- the mixture was applied on the aluminum mesh used as a charge collector, under dryness argon atmosphere, it dried at 100 degrees C for 1 hour, and the positive-active-material layer was formed

[0096] And the aluminum mesh in which the positive-active-material layer was formed was made into the pellet-like positive electrode by piercing to disc-like [with a diameter of 15mm]. In addition, the 60mg active material is supported by this one positive electrode.

[0097] Next, it considered as the negative electrode by piercing a lithium metallic foil to a positive electrode and abbreviation isomorphism.

[0098] Subsequently, nonaqueous electrolyte was prepared by dissolving one-mol LiN (CF3SO2)2 to siloxane 1kg.

[0099] The positive electrode obtained as mentioned above was held in the positive-electrode can, the negative electrode was held in the negative-electrode can, and separator was allotted between the positive electrode and the negative electrode. Nonaqueous electrolyte was poured in into the positive-electrode can and the negative-electrode can, and the 2025 type coin type test cell was produced by fixing a positive-electrode can and a negative-electrode can in total.

[0100] The charge and discharge test was performed about this test cell. After performing constant-current charge to 4.0V to a test cell, electric discharge was performed and the time of a cell voltage falling to 2.5V was considered as the electric discharge end. In addition, charge and electric discharge are performed in ordinary temperature (23 degrees C), and, for charge and electric discharge, current density is 0.12 mA/cm2. It carried out.

[0101] A charge-and-discharge property is shown in drawing 3 . Drawing 3 shows that the test cell of this example has a good charge-and-discharge property.

[0102]

[Effect of the Invention] According to this invention, the nonaqueous electrolyte cell which was excellent in a cell property, economical efficiency, environmental correspondence nature, and all the safeties can be realized, and a practical advantage is large so that clearly also from the above explanation.

[0103] Moreover, since voltage is set up lowness rather than the conventional lithium ion battery, the nonaqueous electrolyte cell of this invention can respond also to the fall of driver voltages, such as IC.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

TECHNICAL FIELD

[The technical field to which invention belongs] this invention relates to the nonaqueous electrolyte cell which makes the compound which has order type olivine structure a positive active material.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

PRIOR ART

[Description of the Prior Art] In recent years, research of the rechargeable battery in which a recharge is possible is advanced as a cell which can be used conveniently [for a long time] and economically with fast progress of various electronic equipment. As a typical rechargeable battery, the lead accumulator, the alkaline battery, the lithium secondary battery, etc. are known.

[0003] Also in the above rechargeable batteries, especially the lithium secondary battery has advantages, such as high power and high-energy density. A lithium secondary battery consists of occlusion, the negative electrode and positive electrode which have the active material which can be emitted, and nonaqueous electrolyte in reversible in a lithium ion.

[0004] And generally as a negative-electrode active material of a lithium secondary battery, a conductive polymer, stratified compounds, etc. (carbon-material metallurgy group oxide etc.) with which the metal lithium, the lithium alloy, and the lithium were doped are used.

[0005] moreover, as a positive active material, a metallic oxide, metallic sulfide, or polymer uses -- having -- Ti_2S , MoS_2 and NbSe_2 , and V_2O_5 etc. -- the non-** lithium compound and the multiple oxide containing Li like Li_xMO_2 ($\text{M}=\text{Co}$, nickel, Mn, Fe, etc.) are proposed [for example,]

[Translation done.]

*** NOTICES ***

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

EFFECT OF THE INVENTION

[Effect of the Invention] According to this invention, the nonaqueous electrolyte cell which was excellent in a cell property, economical efficiency, environmental correspondence nature, and all the safeties can be realized, and a practical advantage is large so that clearly also from the above explanation.

[0103] Moreover, since voltage is set up lowness rather than the conventional lithium ion battery, the nonaqueous electrolyte cell of this invention can respond also to the fall of driver voltages, such as IC.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

TECHNICAL PROBLEM

[Problem(s) to be Solved by the Invention] By the way, in the above-mentioned lithium secondary battery, various technical problems are left behind and those improvements are demanded.

[0007] For example, LiCoO_2 which has the potential of pair $\text{Li}4\text{V}$ from a viewpoint that high-energy density and the high voltage are obtained in the conventional lithium secondary battery. It is widely put in practical use as a positive electrode. LiCoO_2 In respect of being various, although it is an ideal positive-electrode material, Co is unevenly distributed as resources on the earth, and since it is rare, it requires great cost, and it has the problem that a problem is in adequate supply, and development of the positive-electrode material replaced with this is desired.

[0008] In the present condition, LiMn_2O_4 (space group $\text{Fd}\bar{3}\text{m}$) which has normal-spinel type structure is the positive-electrode material of the 4V class only Mn base, from the point of the easy synthesis method and cell capacity, is very promising and is already put in practical use in part.

[0009] However, when the application to a real cell is considered, it is left behind while the problem about stability, such as capacity degradation at the time of elevated-temperature preservation and the dissolution into the electrolytic solution of Mn, and the problem about a cycle property have been still more nearly unsolved.

[0010] Moreover, although it is abundant in [Mn] resources, and it will be thought that it is very useful if the positive-electrode material which used Fe lower than Co, nickel, Mn, etc. for whether it being ** as the base also about toxicity is realizable, property sufficient in an old examination is not acquired. Until now, it is LiCoO_2 . LiNiO_2 LiFeO_2 which has similar structure. Although examination of material considered as basic composition has been carried out to the center, structure is unstable and only the inadequate property is completely realized as a positive active material for rechargeable batteries in the top where production is difficult.

[0011] On the other hand, also about the electrolytic solution, conventionally, the inflammable organic solvent is used and it has left various problems. For example, a high current flows and generates heat rapidly at the time of an unprepared short circuit, the electrolytic solution causes evaporation and decomposition by this, and there is a problem of generating gas. Generating of such gas may lead to breakage, destruction, etc. of a cell.

[0012] Management of preparing the relief valve and current interrupting device which cleave by the rise of cell internal pressure as the solution method is made.

[0013] However, in improvement of such a structure and a mechanism, it does not restrict that any problems can be coped with, but a radical improvement of cell material is needed.

[0014] Then, this invention aims at offering the nonaqueous electrolyte cell which can reduce the problem of environmental correspondence nature or safety, being proposed in view of this conventional actual condition, and realizing high-capacity-izing and low-cost-ization.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.

2. **** shows the word which can not be translated.

3. In the drawings, any words are not translated.

MEANS

[Means for Solving the Problem] In order to attain the above-mentioned purpose, this invention is [occlusion, the negative electrode to emit, and] a general formula Li_xMyPO_4 (however, $0 \leq x \leq 2$ and y of x are $0.8 \leq y \leq 1.2$ among a formula.) in reversible about a lithium. Moreover, M is a component containing 3d transition metals. It has a positive electrode containing the compound expressed, and an electrolyte, and the above-mentioned electrolyte is characterized by containing a siloxane derivative.

[0016] Fe is abundant for whether it being ** in resources compared with elements, such as Co, nickel, and Mn, and its price is also cheap, and it is nonpoisonous so that it may be known well -- it is harmless Furthermore, Si which is the principal component of a siloxane derivative, and existing very abundantly on the earth are also known well.

[0017] therefore, LiFePO_4 from -- by combining the becoming positive-electrode material and the electrolyte containing a siloxane derivative, a low electrochemistry device is extremely realized for an environmental load or toxicity by the low cost

[0018] Furthermore, chemical stability is high, by using for electrolyte material the siloxane which is the inorganic polymer of fire-resistant and low vapor pressure, evaporation of the electrolytic solution and decomposition are suppressed, breakage of a cell and the danger of ignition are also suppressed simultaneously, and the outstanding cell performance is attained.

[0019] In addition, LiFePO_4 Since covalent bond of the oxygen is firmly carried out to P, maceration cannot happen very easily and it has the feature of being hard to carry out induction of the combustion reaction. Therefore, the property of the fire retardancy and low vapor pressure which the above-mentioned siloxane derivative has, and a cell system with safety high conjointly very are built.

[0020]

[Embodiments of the Invention] Hereafter, the composition of the nonaqueous electrolyte cell which applied this invention is explained in detail, referring to a drawing.

[0021] The nonaqueous electrolyte cell of this invention is equipped with a positive electrode, a negative electrode, and an electrolyte as a fundamental component.

[0022] (And the compound Li_xMyPO_4 (however, $0 \leq x \leq 2$ and y of x are $0.8 \leq y \leq 1.2$ among a formula.) which has olivine structure as a positive active material first in this invention, i.e., a general formula) Moreover, M is a component containing 3d transition metals. The compound expressed is used.

[0023] As a compound expressed with Li_xMyPO_4 , $\text{Li}_x\text{Fe}_y\text{PO}_4$, $\text{Li}_x\text{Mn}_y\text{PO}_4$, $\text{Li}_x\text{Co}_y\text{PO}_4$, $\text{Li}_x\text{Ni}_y\text{PO}_4$, $\text{Li}_x\text{Cu}_y\text{PO}_4$, $\text{Li}_x(\text{Fe}, \text{Mn})_y\text{PO}_4$, $\text{Li}_x(\text{Fe}, \text{Co})_y\text{PO}_4$, $\text{Li}_x(\text{Fe}, \text{nickel})_y\text{PO}_4$, $\text{Li}_x(\text{Cu}, \text{Mn})_y\text{PO}_4$, $\text{Li}_x(\text{Cu}, \text{Co})_y\text{PO}_4$, and $\text{Li}_x(\text{Cu}, \text{nickel})_y\text{PO}_4$ grade are mentioned, for example. In addition, in each compound, the composition ratio of the element in a parenthesis is arbitrary.

[0024] For example, LiFePO_4 Volume density is 3.6 g/cm³. It is large, and the high potential of 3.4V is generated and geometric capacity is also as large as 170 mAh/g. And LiFePO_4 It is an initial state, and electrochemically, since one Li in which a ** dope is possible is included per Fe atom, capacity is very high as a positive active material of a lithium ion battery. Moreover, it is this LiFePO_4 so that it may mention later. It is compoundable by the simple method.

[0025] however, the above LiFePO_4 LiFePO_4 obtained by the old synthesis method when it is going to use as a positive active material of an actual cell **** -- only about [60 mAh/g-70 mAh/g] actual capacity is obtained, but actual capacity of about 120 mAh/g is realized at the maximum -- it is not

alike too much. Considering that geometric capacity is 170 mAh/g, it is hard to say that sufficient capacity is attained.

[0026] for example, LiFePO_4 the case where LiMn_2O_4 is compared -- LiMn_2O_4 -- average voltage -- 3.9V -- it is -- the capacity of 120 mAh/g -- having -- further -- volume density -- 4.2g/cm^3 it is -- since -- LiFePO_4 As compared with LiMn_2O_4 , voltage and volume density will be small about ten percent. For this reason, LiFePO_4 which has the capacity of the same 120 mAh/g It will become small twenty percent or more with a volume energy density ten percent or more with a weight energy density rather than LiMn_2O_4 .

[0027] Therefore, LiFePO_4 It is LiFePO_4 although 140 mAh/g or the capacity beyond it is required in order to realize LiMn_2O_4 , equivalent level, or the energy density beyond it. Such high capacity is not realized until now.

[0028] Moreover, LiFePO_4 It is conventionally compounded by [of 800 degrees C] being comparatively heated at an elevated temperature under reduction environment using the salt of the divalent iron of iron acetate $\text{Fe}(\text{CH}_3\text{COO})_2$ grade as a source of Fe used as a synthetic powder. When the heating temperature at the time of composition is high, the load which will consume the part energy and is given to a reactor etc. is also large.

[0029] Furthermore, LiFePO_4 compounded by [of 800 degrees C] being comparatively heated at an elevated temperature Crystallization will advance superfluously. For this reason, it is LiFePO_4 when it uses for the positive active material of a nonaqueous electrolyte cell. Diffusion of the lithium within a particle does not fully take place, but there is a possibility that a capacity high enough cannot be obtained.

[0030] That these problems should be solved, as a result of repeating various examination, it is Li_xMyPO_4 . If carried out, it turns out that it is good to use the thing containing that whose particle diameter is 10 micrometers or less. Li_xMyPO_4 which a positive active material contains Li_xMyPO_4 whose particle diameter it carries out and is 10 micrometers or less Since particle size distribution are not suitable when it does not contain, what the lithium which is a charge carrier cannot fully diffuse in the particle of a positive active material is conjectured.

[0031] Moreover, Li_xMyPO_4 It is desirable that the diameter of 10% volume accumulation is 1 micrometer or less. It is Li_xMyPO_4 when the diameter of 10% volume accumulation is larger than 1 micrometer. There is a possibility that crystallization may advance too much and a giant particle may occupy most. Thus, when crystallization advances too much, there is a possibility that the lithium which is a charge carrier cannot be smoothly spread in the particle of a positive active material.

[0032] Li_xMyPO_4 which has the above particle size distributions, for example, LiFePO_4 , Below, as it is shown below, it compounds.

[0033] First, iron acetate ($\text{Fe}_2(\text{CH}_3\text{COO})_6$), phosphoric-acid hydrogen ammonium ($\text{NH}_4\text{H}_2\text{PO}_4$), and a lithium carbonate (Li_2CO_3) are mixed by the predetermined ratio as a synthetic powder, and it considers as a precursor. Here, mixture of a synthetic powder is fully performed. Since each raw material is mixed-uniformly and a point of contact increases by fully mixing a synthetic powder, it is LiFePO_4 at temperature lower than before. It becomes possible to compound.

[0034] Next, it is LiFePO_4 by heating this precursor at predetermined temperature among inert gas atmosphere, such as nitrogen. It is compounded.

[0035] The former and LiFePO_4 For example, it was compounded at the comparison-elevated temperature of 800 degrees C. When the temperature at the time of composition was high, the load which will consume the part energy and is given to a reactor etc. was also large.

[0036] Then, by fully mixing a synthetic powder, considering as a precursor, and compounding by heating in a nitrogen air current, it compares with conventional 800 degrees C of 300 degrees C, and is LiFePO_4 at far low temperature. It becomes possible to compound. That is, it compares with the former and is LiFePO_4 at a larger temperature requirement. It becomes possible to compound and the width of face of selection of the temperature at the time of composition spreads.

[0037] this invention person is LiFePO_4 . The temperature (synthetic temperature is called hereafter.) which heats a precursor in case it compounds, and LiFePO_4 The synthetic temperature of optimal LiFePO_4 was examined paying attention to the relation with the capacity of the cell used as an active material.

[0038] Consequently, LiFePO₄ Synthetic temperature was understood that it is desirable to consider as the range of 400 degrees C or more and 700 degrees C or less. As for synthetic temperature, it is more desirable that it is the range of 400 degrees C or more and 600 degrees C or less.

[0039] LiFePO₄ Crystallization does not fully progress with a low and a chemical reaction rather than 400 degrees C, but synthetic temperature is uniform LiFePO₄. It cannot obtain. Moreover, when the synthetic temperature of LiFePO₄ is higher than 700 degrees C, crystallization advances superfluously and there is a possibility that a deposit of an impurity may not be suppressed.

[0040] In addition, in the manufacture method mentioned above, before carrying out heating composition of the precursor, it is desirable to remove beforehand the air which performs deairation processing to a precursor and is contained in a precursor.

[0041] It is LiFePO₄ when air remains in a precursor. At the time of composition, Fe²⁺ in the iron acetate which is a divalent iron compound will oxidize by the oxygen in air, and will turn into Fe³⁺. Consequently, the trivalent iron compound which is an impurity is LiFePO₄ of a product. It will mix in inside. By removing the air beforehand contained by deairation processing in a precursor, oxidization of Fe²⁺ in iron acetate can be prevented. Consequently, a trivalent iron compound is LiFePO₄ of a product. It does not mix in inside but is LiFePO₄ of single phase. It can obtain.

[0042] LiFePO₄ Although various raw materials, such as a lithium hydroxide, a lithium nitrate, an acetic-acid lithium, a phosphoric-acid lithium, the first iron of a phosphoric acid, and a ferrous oxide, can be used as a synthetic powder besides the compound mentioned above, in order [which is called 400 degrees C or more and 700 degrees C or less] to compound at low temperature comparatively, it is desirable to use a reactant high raw material.





[0043] By the manufacture method which was mentioned above, since a synthetic powder is mixed, it considers as a precursor and this precursor is heated at the temperature of 400 degrees C or more and 700 degrees C or less, a chemical reaction and crystallization advance uniformly and crystallization does not advance too much. Thereby, there is no impurity and it is LiFePO₄ of single phase. It is obtained. Thus, LiFePO₄ compounded It will be LiFePO₄ if it uses as a positive active material. The high actual capacity for which 170 mAh/g which is geometric capacity is pressed is realizable.

[0044] in addition, LiFePO₄ which mentioned the above-mentioned manufacture method above not only -- general formula Li_xMyPO₄ It is applied also to the compound expressed.

[0045] On the other hand, in this invention, the siloxane derivative in which an electrolyte is shown by following ** 2 is contained.

[0046]

[Formula 2]

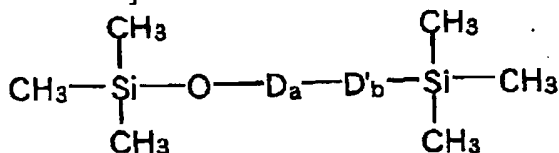


(式中、aは0から100の整数を表し、bは1から100の整数を表し、m



は0から100の整数を表し、nは0から100の整数を表し、Rは水素原

[0047] The siloxane derivative which specifically has structure as shown in following ** 3 --izing 5 can be used.


[Formula 3]

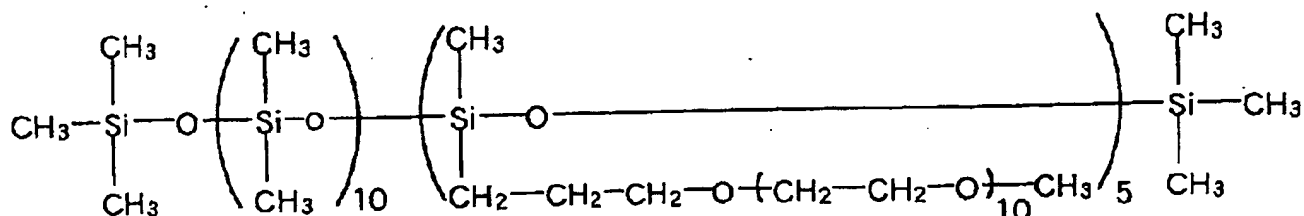

[Formula 4]

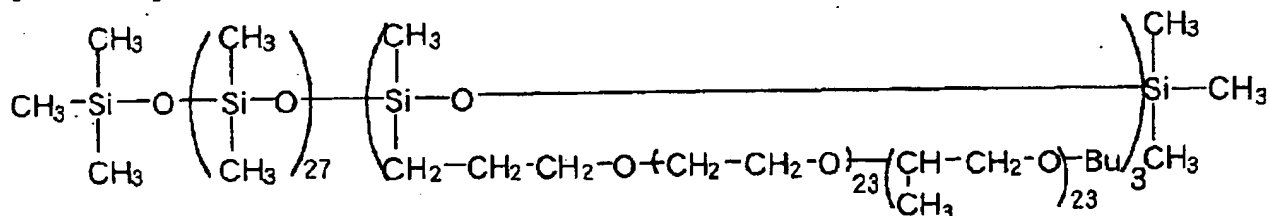

[Formula 5]

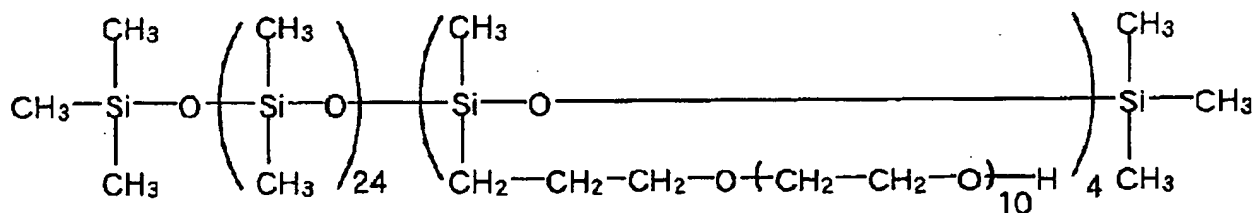

[0051] It is the shape type siloxane derivative of a chain with which it had the chain combination of a silicon and oxygen in the basic skeleton, and the univalent organic machine was added to the silicon as a side chain, its chemical stability is high, and since the above-mentioned siloxane derivative is low vapor pressure in fire retardancy, it is an inorganic polymer which is excellent also in thermochemical stability.

[0052] An electrolyte may be the so-called liquefied electrolytic solution, and may be a solid electrolyte and a gel electrolyte.

[0053] When making an electrolyte into the electrolytic solution, viscosity is a low solution-like comparatively, and a siloxane derivative is asked for the structure where a light metal salt may be dissolved. That is, coefficients of kinematic viscosity [in / the temperature of 25 degrees C / in a siloxane derivative] are below 5000cSt(s) (centistokes), and it is called for that average molecular

piece end, the thing which constructed the bridge in the compound which has a point constructing a bridge in a side chain are arbitrary.


[0064] However, in the above-mentioned 3-dimensional network structure, in order to realize higher ionic conductivity, it is desirable to have the free end side chain including ether linkage like the branching structure of polyoxyalkylene.

[0065] As the structure of cross linkage of the 1st high molecular compound, although ether linkage, ester combination, a urethane bond, etc. are mentioned, of course not only according to this but a use etc., the arbitrary structure of cross linkage is employable.

[0066] The polymer of the diester compound shown in following ** 6 as an example of such 1st high molecular compound can be mentioned.

[0067]

[Formula 6]




(式中、 R_1 、 R_2 および R_3 は水素原子または炭素数 1～6 のアルキル基を示し、それぞれは同一であっても異なってもよい。また、 $x \geq 1$ かつ $y \geq 0$ または $x \geq 0$ かつ $y \geq 1$ である。)

[0068] In this case, it is desirable to use together the monoester compound shown in following ** 7 for the purpose of introducing a free end side chain which was mentioned above.

[0069]

[Formula 7]



(式中、 R_4 、 R_5 および R_6 は水素原子または炭素数 1～6 のアルキル基を示し、それぞれは同一であっても異なってもよい。また、 $x \geq 1$ かつ $y \geq 0$ または $x \geq 0$ かつ $y \geq 1$ である。)

[0070] As for the ratio (a monoester compound / diester compound) of the diester compound at that time, and a monoester compound, it is desirable to carry out to 5.0 or less by the weight ratio.

[0071] The salt of light metals, such as a lithium, sodium, and aluminum, can be used for the light metal salt dissolved in the above-mentioned electrolyte (compatibility), and it can set to it expedient according to the kind of cell.

[0072] for example, in constituting a lithium or a rechargeable lithium-ion battery LiBF_4 , LiClO_4 , LiPF_6 , LiAsF_6 , $\text{CF}_3\text{SO}_3\text{Li}$, 2NLi , $\text{C}_4\text{F}_9\text{SO}_3\text{Li}$, $\text{CF}_3\text{CO}_2\text{Li}$, $(\text{CF}_3\text{SO}_2)_2\text{NLi}$, $\text{C}_6\text{F}_5\text{SO}_3\text{Li}$, $\text{C}_8\text{F}_{17}\text{SO}_3\text{Li}$, $(\text{CF}_3\text{CO}_2)_2\text{NLi}$ and $\text{NLi}(\text{s})$ ($\text{CF}(\text{C}_4\text{F}_9\text{SO}_2)_3\text{SO}_2$), $(\text{C}_2\text{F}_5\text{SO}_2)_2$ -- $(\text{FSO}_2\text{C}_6\text{F}_4)_2$ NLi , $2(2(\text{CF}_3)\text{CHOSO}_2)\text{NLi}$, $3(\text{CF}_3\text{SO}_2)\text{CLi}$, and 4 $(3\text{C}_6\text{F}_3(\text{CF}_3)_2-5)$ -- the lithium salt of BLi , LiCF_3 , and LiAlCl_4 grade can be used (CF_3SO_2)

[0073] Although a nonaqueous electrolyte cell is equipped with components, such as a negative electrode besides the above-mentioned positive electrode and an electrolyte, other components can use the conventional thing and the same thing.

[0074] Hereafter, a button type cell is made into an example and the component of a nonaqueous electrolyte cell is explained.

[0075] In equipping the button type nonaqueous electrolyte cell 1 with the separator 6 allotted between the positive-electrode can 5 which holds a negative electrode 2, the negative-electrode can 3 which holds a negative electrode 2, a positive electrode 4, and a positive electrode 4 as shown in drawing 1, and a positive electrode 4 and a negative electrode 2, and an insulating gasket 7 and using the electrolytic solution as an electrolyte, it comes to fill up nonaqueous electrolyte in the negative-electrode can 3 and the positive-electrode can 5. In using a solid electrolyte and a gel electrolyte, it forms a solid electrolyte layer and a gel electrolyte layer on the active material layer of a negative

electrode 2 or a positive electrode 4.

[0076] It comes to form the negative-electrode active material layer to which a negative electrode 2 contains a negative-electrode active material on a negative-electrode charge collector. As a negative-electrode charge collector, a nickel foil etc. is used, for example.

[0077] As a negative-electrode active material, a conductive polymer, stratified compounds, etc. (carbon-material metallurgy group oxide etc.) with which the metal lithium, the lithium alloy, and the lithium were specifically doped using the thing in which a dope / ** dope is possible in the lithium are used.

[0078] As a binder contained in a negative-electrode active material layer, a well-known resin material usually used as a binder of the negative-electrode active material layer of this kind of nonaqueous electrolyte cell can be used. When for example, a metal lithium foil is used as a negative-electrode active material, the above-mentioned binder is unnecessary.

[0079] The negative-electrode can 3 holds a negative electrode 2, and serves as an external terminal (negative electrode) of the nonaqueous electrolyte cell 1.

[0080] It comes to form the positive-active-material layer which contains $\text{Li}_x\text{M}_y\text{PO}_4$ (for example, LiFePO_4) which explained the positive electrode 4 previously on the positive-electrode charge collector as a positive active material.

[0081] As a positive-electrode charge collector, an aluminum foil etc. is used, for example.

[0082] As a binder contained in a positive-active-material layer, a well-known resin material usually used as a binder of the positive-active-material layer of this kind of nonaqueous electrolyte cell can be used.

[0083] The positive-electrode can 5 holds a positive electrode 4, and serves as an external terminal (positive electrode) of the nonaqueous electrolyte cell 1 too.

[0084] Separator 6 can make a positive electrode 4 and a negative electrode 2 able to estrange, and a well-known material usually used as separator of this kind of nonaqueous electrolyte cell can be used, for example, high polymer films, such as polypropylene, are used. Moreover, the thickness of the relation between lithium ion conductivity and an energy density to separator needs a thing thin as much as possible. Specifically, the thickness of separator has desirable 50 micrometers or less. In addition, when a solid electrolyte and a gel electrolyte are used as an electrolyte, it is not necessary to necessarily form this separator 6.

[0085] The insulating gasket 7 is incorporated and united with the negative-electrode can 3. This insulating gasket 7 is for preventing exsorption of the nonaqueous electrolyte with which it filled up in the negative-electrode can 3 and the positive-electrode can 5.

[0086] The nonaqueous electrolyte cell concerning this invention may be a primary cell, and may be a rechargeable battery. Moreover, it is not limited especially about the configuration and let cylindrical, a square shape, a coin type, a button type, etc. be a thin shape, large-sized **, and arbitrary sizes.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. **** shows the word which can not be translated.
3. In the drawings, any words are not translated.

EXAMPLE

[Example] Hereafter, the nonaqueous electrolyte cell of this invention is explained based on a concrete experimental result.

[0088] Here, it is olivine type LiFePO_4 . The nonaqueous electrolyte rechargeable battery made into a positive active material was produced.

[0089] LiFePO_4 In order to have compounded, the phosphoric-acid 2 hydrogen ammonium ($\text{NH}_4\text{H}_2\text{PO}_4$) of a raw material with large microcrystal size was fully ground beforehand first. Next, it fully mixed and iron acetate ($\text{Fe}_2(\text{CH}_3\text{COO})$), phosphoric-acid 2 hydrogen ammonium ($\text{NH}_4\text{H}_2\text{PO}_4$), and the lithium carbonate (Li_2CO_3) were used as the precursor so that a mole ratio might be set to 2:2:1.

[0090] Next, it is LiFePO_4 by heating a precursor at 550 degrees C under nitrogen-gas-atmosphere mind for 24 hours, after performing temporary baking of 12 hours for a precursor at 320 degrees C under nitrogen-gas-atmosphere mind. It compounded.

[0091] LiFePO_4 compounded by method which was mentioned above ***** -- the powder X diffraction pattern was measured The measurement conditions of a powder X diffraction are as follows.

[0092] used equipment: -- Rigaku RINT2500 rotating-target X-ray: -- 40kV of CuKalpha, the slit width:diver Gent (slit DS) =1 degree RESHIBINGU (slit RS) =1 degree (scattering slit SS) =1.5mm counter:scintillation counter measuring method:reflection methods of which a vertical-mold standard and 100mA goniometer:radius counter monochromator [of 185mm]:use filter:use are not done, and the powder X-ray patterns measured by continuation scan scanning-zone:2 theta= 10 degrees - 80 degree scan speed:4 degree Compounded LiFePO_4 It sets and is LiFePO_4 in a product. It is not checked but existence of the impurity of an except is LiFePO_4 of single phase. It turns out that it is obtained.

[0093] LiFePO_4 which is there, next was obtained as mentioned above It used as a positive active material and the cell was produced.

[0094] first, 70 % of the weight (dry LiFePO_4) of positive active materials and an electric conduction agent (acetylene black) -- 25 % of the weight and 5 % of the weight (polyvinylidene fluoride) of binders -- ****(ing) -- this -- the inside of a solvent (dimethylformamide) -- supplying -- uniform -- mixing -- a paste-like positive electrode -- the mixture was prepared In addition, Aldrich 1300 [#] were used for the polyvinylidene fluoride.

[0095] next, this positive electrode -- the mixture was applied on the aluminum mesh used as a charge collector, under dryness argon atmosphere, it dried at 100 degrees C for 1 hour, and the positive-active-material layer was formed

[0096] And the aluminum mesh in which the positive-active-material layer was formed was made into the pellet-like positive electrode by piercing to disc-like [with a diameter of 15mm]. In addition, the 60mg active material is supported by this one positive electrode.

[0097] Next, it considered as the negative electrode by piercing a lithium metallic foil to a positive electrode and abbreviation isomorphism.

[0098] Subsequently, nonaqueous electrolyte was prepared by dissolving one-mol $\text{LiN}(\text{CF}_3\text{SO}_2)_2$ to siloxane 1kg.

[0099] The positive electrode obtained as mentioned above was held in the positive-electrode can, the
http://www4.ipdl.jpo.go.jp/cgi-bin/tran_web.cgi_ejje

negative electrode was held in the negative-electrode can, and separator was allotted between the positive electrode and the negative electrode. Nonaqueous electrolyte was poured in into the positive-electrode can and the negative-electrode can, and the 2025 type coin type test cell was produced by fixing a positive-electrode can and a negative-electrode can in total.

[0100] The charge and discharge test was performed about this test cell. After performing constant-current charge to 4.0V to a test cell, electric discharge was performed and the time of a cell voltage falling to 2.5V was considered as the electric discharge end. In addition, charge and electric discharge are performed in ordinary temperature (23 degrees C), and, for charge and electric discharge, current density is 0.12 mA/cm². It carried out.

[0101] A charge-and-discharge property is shown in drawing 3 . Drawing 3 shows that the test cell of this example has a good charge-and-discharge property.

[Translation done.]

*** NOTICES ***

Japan Patent Office is not responsible for any damages caused by the use of this translation.

1.This document has been translated by computer. So the translation may not reflect the original precisely.

2.**** shows the word which can not be translated.

3.In the drawings, any words are not translated.

DESCRIPTION OF DRAWINGS

[Brief Description of the Drawings]

[Drawing 1] It is the outline cross section showing the example of 1 composition of a nonaqueous electrolyte cell.

[Drawing 2] Compounded LiFePO_4 It is drawing showing a powder X diffraction pattern.

[Drawing 3] It is the property view showing the charge-and-discharge property of the produced test cell.

[Translation done.]

* NOTICES *

Japan Patent Office is not responsible for any damages caused by the use of this translation.


1. This document has been translated by computer. So the translation may not reflect the original precisely.

2. **** shows the word which can not be translated.


3. In the drawings, any words are not translated.

DRAWINGS


[Drawing 1]

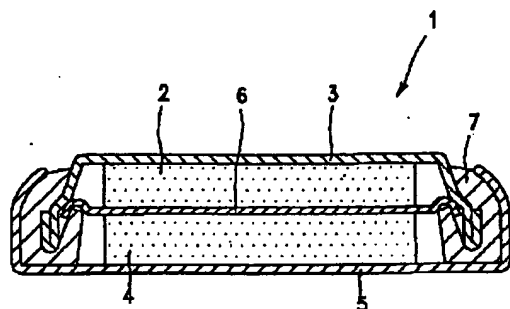

[Drawing 2]

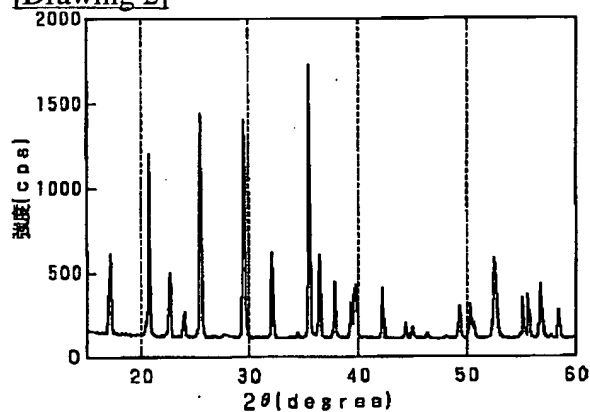

[Drawing 3]

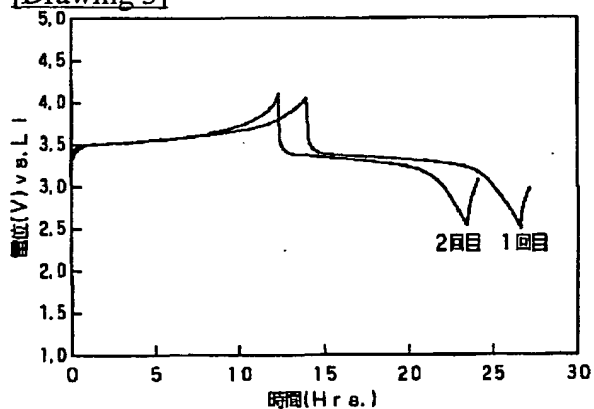

[Translation done.]

THIS PAGE BLANK (USPTO)